


NEW

Lutron energy-saving products

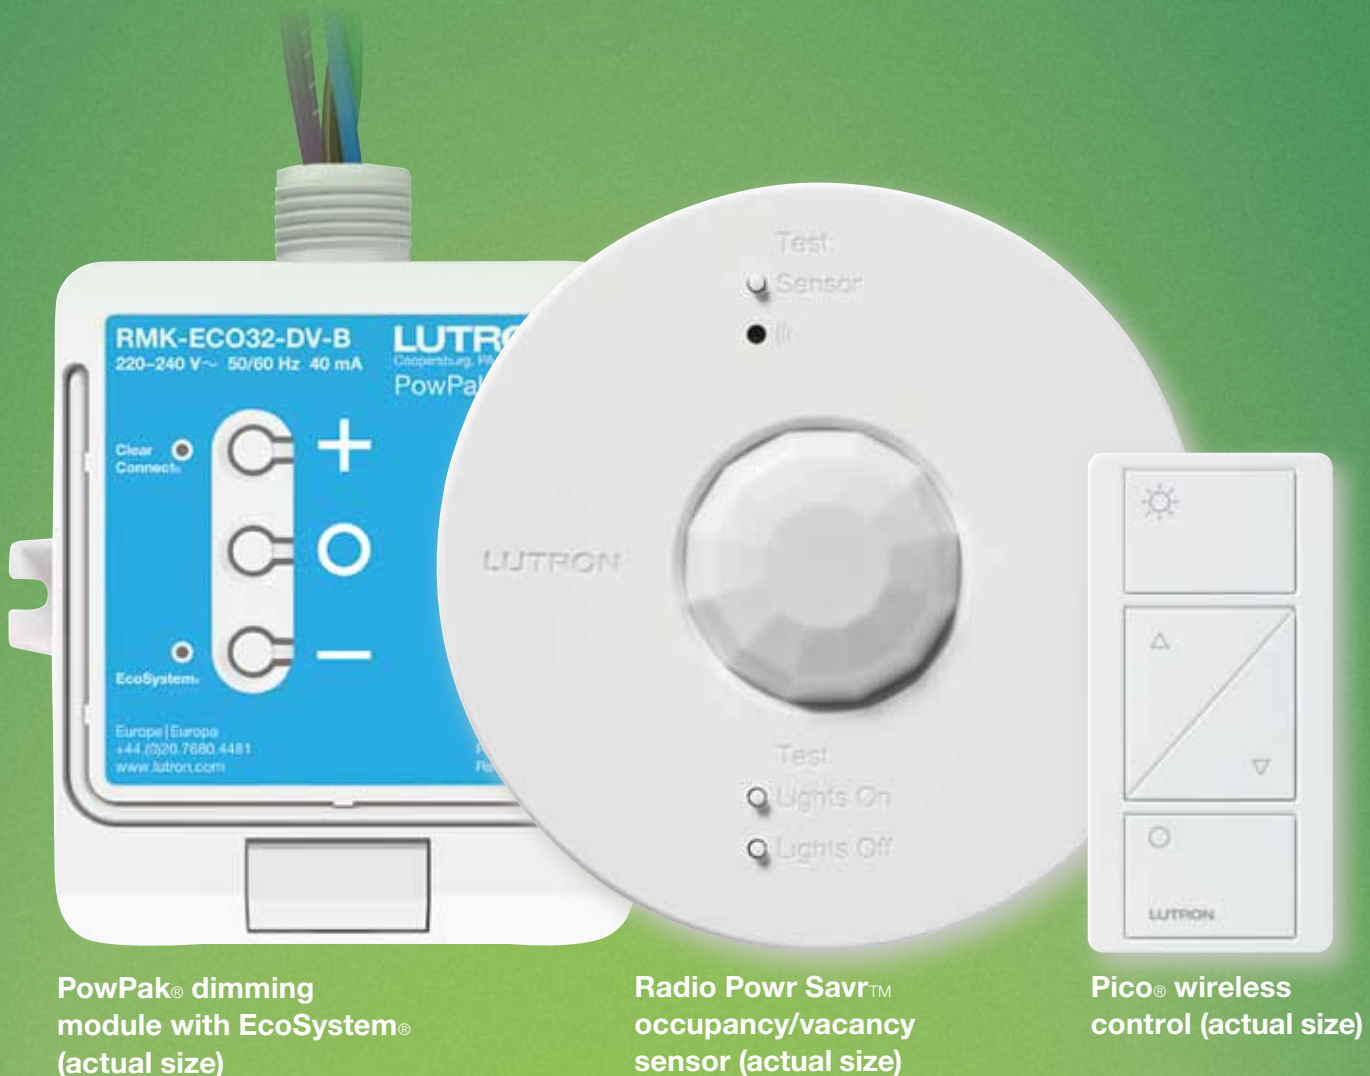

PowPak® dimming
module with EcoSystem®
(actual size)

Radio Powr Savr™
occupancy/vacancy
sensor (actual size)

Pico® wireless
control (actual size)


Quick Install Energy Solutions

Featuring Energi TriPak®

Energi TriPak®

Energi TriPak is a family of wireless energy-saving products featuring Radio Powr Savr™ sensors, Pico® controls and PowPak® load controllers. These components, when combined:

- save up to 60%¹ of lighting electricity usage
- increase occupant comfort and productivity
- control virtually all loads
- reduce installation and programming costs

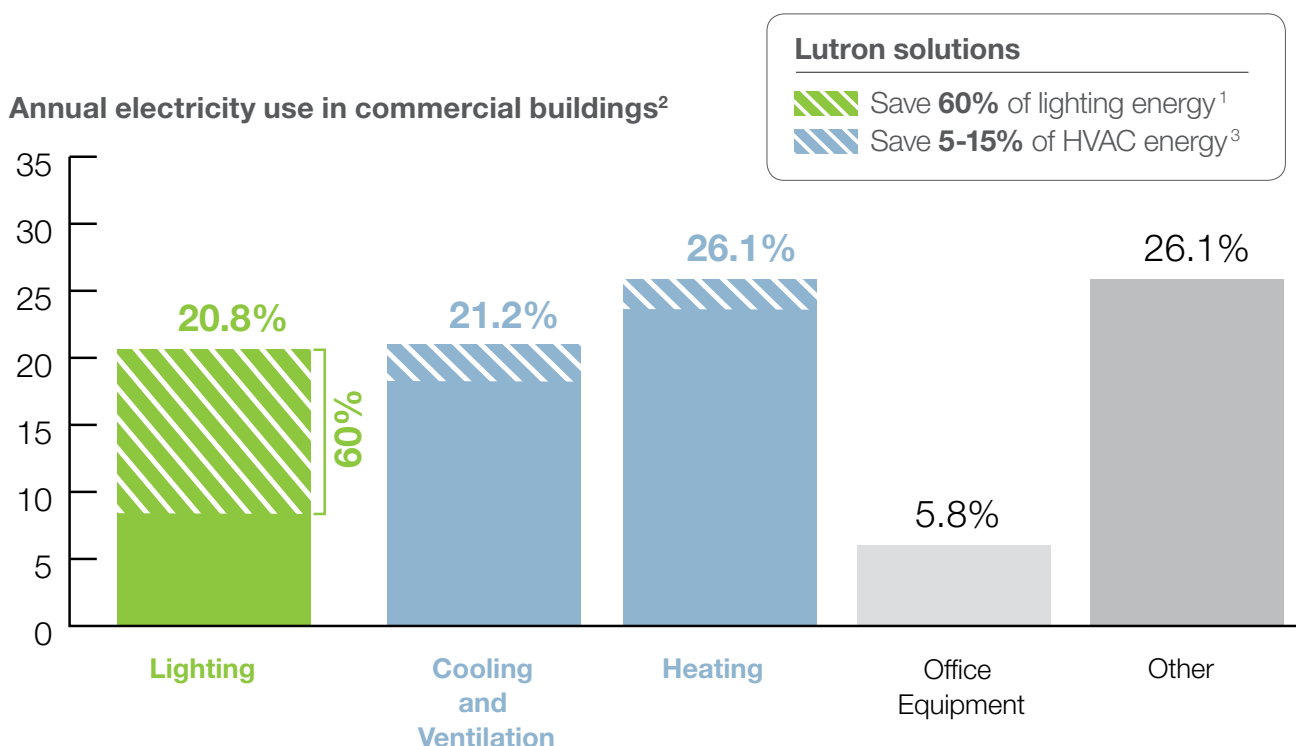

Lighting typically accounts for 20.8%² of electricity usage in new construction and retrofit commercial applications, which include spaces such as classrooms and offices. These applications benefit from Energi TriPak energy savings through strategies like automatic occupancy/vacancy sensing and daylight harvesting.

Studies show that proper lighting is beneficial to space occupants. By providing task-appropriate lighting and individual lighting control, Energi TriPak improves comfort and occupant satisfaction, resulting in increased productivity.⁴

Energi TriPak requires no additional wiring. The components communicate wirelessly via Lutron's reliable Clear Connect® Radio Frequency (RF) technology. In addition, simple button press programming eliminates the need for factory commissioning.

Sources located on back cover.

Energi TriPak design and application guide

- 02** What is Energi TriPak?
- 03** Benefits and energy-saving control strategies

Applications

- 04** Public bathroom application
- 06** Private office application
- 08** Conference room application
- 10** Classroom application
- 12** How to design a system

Energi TriPak components

- 14** PowPak® relay module
- 15** Rania® RF switch
- 16** PowPak dimming module with EcoSystem®
- 17** EcoSystem H-Series ballast
- 18** EcoSystem 5-Series LED driver
- 19** PowPak contact closure output module
- 20** Radio Powr Savr™ wireless occupancy/vacancy sensors
- 21** Radio Powr Savr wireless daylight sensor
- 22** Pico® wireless controls

How it works

- 23** Concept drawings
- 28** How it works
- 30** Sensor coverage diagrams
- 32** Ordering information

Energi TriPak®

What is Energi TriPak?

Energi TriPak consists of transmitting devices that send out radio frequency (RF) commands to the load controllers. The load controllers receive the RF command and perform the appropriate action based on the information received.

Transmitting devices

Sense

Radio Powr Savr™ wireless sensors



Occupancy/vacancy



Daylight

Adjust

Pico® wireless control



Wall-mount



Tabletop



Hand-held

Load controllers

Conserve

Switch




Relay module



Rania® RF switch

Dim



Dimming module
with EcoSystem®

Integrate



Contact closure
output module



Benefits and energy-saving control strategies

Ease of installation and programming


- All points of control are wireless for simple installation with no new wiring
- Simple button programming procedures for all devices

Cost-effective

- Contractor programmable
- Overall labour and cabling costs reduced due to wireless communication – no additional wiring

Save energy and money

Simply incorporate the following energy-saving control strategies:

			Potential savings
	Occupancy/vacancy sensing	turns lights on when occupants are in a space and off or dimmed when they vacate the space.	20–60% Lighting ⁵
	Daylight harvesting	dims electric lights when daylight is available to light the space.	25–60% Lighting ⁶
	High-end trim	sets the maximum light level based on customer requirements in each space.	10–30% Lighting ⁷
	Personal dimming control	gives occupants the ability to set the light level.	10–20% Lighting ⁸
	Plug load control	automatically turns off loads after occupants leave a space.	15–50% ⁹ Controlled loads
	HVAC integration	controls heating, ventilation and air conditioning systems through contact closure.	5–15% ³ HVAC

Sources located on back cover.

Energi TriPak® application — Public bathroom

In public spaces, such as bathrooms, lighting is often on even when the space is unoccupied. Automatic lighting control with occupancy sensing is an ideal energy-saving lighting solution.

Energy-saving strategies

Occupancy sensing

Potential lighting energy savings:

50%⁵



Sources located on back cover.



Radio Powr Savr™ ceiling-mount occupancy/vacancy sensor

communicates with load controllers to turn lights on or off based on occupancy





PowPak® relay module with Softswitch®

switches loads in response to wireless sensors and controls (mounted in ceiling)



Energi TriPak® application — Private office

Providing personal lighting control in a private office application helps improve occupant comfort.

Energy-saving strategies

Occupancy/vacancy sensing
Daylight harvesting
High-end trim
Personal dimming control


Potential lighting
energy savings:

45%



Radio Powr Savr™ daylight sensor

communicates with load controllers to dim or turn lights on or off based on amount of daylight available



EcoSystem® H-Series digital ballast

combines superior 1% dimming performance and Lutron reliability



Radio Powr Savr ceiling-mount occupancy/vacancy sensor

communicates with load controllers to dim or turn lights on or off based on occupancy



PowPak® dimming module with Ecosystem

dims lighting loads in response to wireless sensors and controls (mounted in ceiling)



Pico® wireless controls

manually control loads with wireless controls that can be placed on the wall or desk top

Energi TriPak® application — Conference room


A conference room must accommodate a wide range of activities and users. The lighting control must be able to adapt to each of the scenarios while being simple and easy to use.

Energy-saving strategies

Occupancy/vacancy sensing
Daylight harvesting
High-end trim
Personal dimming control

Potential lighting
energy savings:

60%

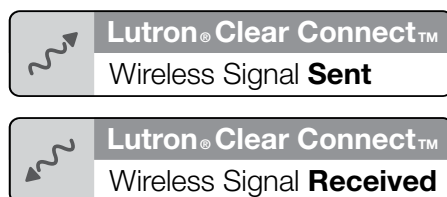

**PowPak® dimming module
with Ecosystem®**

dims lighting loads in response to wireless
sensors and controls (mounted in ceiling)



EcoSystem 5-Series LED driver

combines guaranteed performance
with smooth, flicker-free dimming to 5%



Radio Powr Savr™ daylight sensor

communicates with load controllers to dim or turn lights on or off based on amount of daylight available



Radio Powr Savr corner-mount occupancy/vacancy sensor

communicates with load controllers to dim or turn lights on or off based on occupancy



Pico® wireless control

manually control loads with wireless controls that can be placed on the wall or tabletop



EcoSystem H-Series digital ballast

combines superior 1% dimming performance and Lutron reliability

Energi TriPak® application — Classroom


A best-practice classroom combines energy efficiency with a high quality learning environment. Classroom lighting plays a particularly critical role because of the direct relationship between good lighting and student performance.¹⁰

Energy-saving strategies

Occupancy/vacancy sensing
Daylight harvesting
High-end trim
Personal dimming control

Potential lighting energy savings:

60%

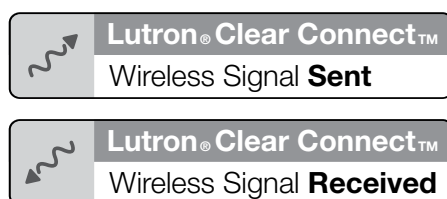

Sources located on back cover.



PowPak® dimming module with EcoSystem®
dims lighting loads in response to wireless sensors and controls (mounted in ceiling)



Pico® wireless controls
manually control loads with wireless controls that can be placed on the wall or desk top



EcoSystem H-Series digital ballast

combines superior 1% dimming performance and Lutron reliability



Radio Powr Savr™ daylight sensor

communicates with load controllers to dim or turn lights on or off based on amount of daylight available



PowPak contact closure output module

integrates with HVAC system or other third-party equipment through contact closures, allowing the equipment to respond to wireless commands (mounted in ceiling)



Radio Powr Savr corner mount occupancy/vacancy sensor

communicates with load controllers to dim or turn lights on or off based on occupancy

Energi TriPak® — How to design a system

Define your space

The appropriate control solution is defined by the needs of the space and its occupants. Use the following steps to plan and design an ideal energy-saving solution.

Step 1 Is control of overhead lighting required?

When switching is desired —

Select the control(s) required based on style and load capacitypgs. 14-15

When dimming is preferred —

Select the EcoSystem® ballast and/or driver when utilising the PowPak® dimming module with EcoSystempgs. 16-18



Step 2 Is third-party equipment integration required?

Select the PowPak contact closure output module pg. 19



Step 3 Is occupancy/vacancy sensing required?

Select the style of the Radio Powr Savr™ occupancy/vacancy sensor based on mounting and coverage requirements pg. 20



Step 4 Is daylight harvesting required?

Select the Radio Powr Savr daylight sensor.....pg. 21



Step 5 Are personal or additional points of control required?

Select the style of the Pico® wireless control required.....pg. 22



Energi TriPak® components — How to design a system

Step 1 Overhead light control selection

PowPak® relay module

Design statement: The PowPak relay model is designed for spaces where local control is not currently available, but is required.



PowPak relay module dimensions

W: 72 mm

H: 87 mm

D: 32 mm

Features

- 5 A or 16 A general purpose switch
- Receives input from up to 9 Pico® wireless controls, 6 Radio Powr Savr™ occupancy/vacancy sensors, and 1 Radio Powr Savr daylight sensor via Lutron® reliable Clear Connect® RF technology
- 16 A model features patented Softswitch® technology—extends relay life to an average of 1,000,000 cycles
- 220-240 V~ input

Benefits

- Save energy with the addition of occupancy sensing, daylight harvesting and personal control without the need for additional wires
- Button press programming to associate the module with the Radio Powr Savr sensors and Pico wireless controls

Mounting

- Module should be installed using the mounting tabs on the enclosure (screws not provided). Module can also be installed in a junction or marshalling box using the conduit nut provided. Consult local and national electrical codes for proper installation.

Models

RMK-5R-DV-B – 5 A general purpose switch

RMK-16R-DV-B – 16 A general purpose switch



Rania® RF switch

Design statement: Specify a Rania RF switch for applications in which a local switch already exists and dimming is not required.



Rania RF switch dimensions

W: 86 mm

H: 86 mm

D: 28 mm

Features

- Digital on/off two-wire tap switch – no neutral required
- Controls up to 5 A lighting or 4 A motor loads
- Utilises Lutron® reliable Clear Connect® RF technology to communicate wirelessly with up to 9 transmitting devices (Radio Powr Savr sensors and/or Pico® wireless controls)
- Controls always operate locally, do not require system control

Benefits

- Save energy with the addition of occupancy sensing and daylight harvesting without the need for additional wires
- Button press programming to associate the control with Radio Powr Savr sensors and Pico wireless controls

Mounting

- Mountable in round or square back boxes with a minimum depth of 35 mm
- Trim ring is available for 25 mm back boxes

Models

RS-SA05-B-FXX-M – Rania RF switch, frameless

RS-SA05-B-IXX-M – Rania RF switch with frame/insert faceplate

RS-SA05-B-BXX-M – Rania RF switch with black frame/metal insert faceplate

RRF-SA05-B-FXX-M – Rania RF switch, frameless package

RRF-SA05-B-IXX-M – Rania RF switch with frame/insert faceplate package



Energi TriPak® components — How to design a system

PowPak® dimming module with EcoSystem®

Design statement: Specify the PowPak dimming module with EcoSystem for the application that requires dimming of fluorescent and LED fixtures and simple reconfiguration of lighting zones.



PowPak dimming module with EcoSystem dimensions

W: 72 mm

H: 87 mm

D: 32 mm

Features

- Controls up to 32 EcoSystem H-Series ballasts, EcoSystem LED drivers and/or EcoSystem 5-Series LED drivers
- Receives input from up to 9 Pico® wireless controls, 6 Radio Powr Savr™ occupancy/vacancy sensors, and 1 Radio Powr Savr daylight sensor via Lutron reliable Clear Connect® RF technology
- Lutron EcoSystem technology facilitates individual ballasts addressing, connection of multiple control devices, and control of ballasts individually or in groups
- 220-240V~ input

Benefits

- Facilitates simple reconfiguration of the space without having to move a single wire
- Dimming saves money and energy—for every percentage reduction in lighting levels, there is a nearly equal reduction in the energy usage of the dimmed light source
- Additional savings can be achieved through high-end trim, occupancy sensing, daylight harvesting and personal control without the need for additional wires
- Button press programming means no commissioning required

Mounting

- Module should be installed using the mounting tabs on the enclosure (screws not provided). Module can also be installed in a junction or marshalling box using the conduit nut provided. Consult local and national electrical codes for proper installation.

Models

RMK-ECO32-DV-B – controls up to 32 EcoSystem H-Series ballasts, EcoSystem LED drivers and/or EcoSystem 5-Series LED driver

For more information on EcoSystem H-Series ballasts, EcoSystem LED drivers, and 5-Series LED drivers, please visit www.lutron.com/europe



EcoSystem H-Series Ballast

Design statement: Utilise EcoSystem H-Series ballasts when using the PowPak® dimming module with EcoSystem to continuously dim fluorescent lamps to 1%.



EcoSystem H-Series ballast dimensions

W: 30 mm

H: 25 mm

L: 359 mm

Features

- Continuous, flicker-free dimming from 100% to 1% for T5 and T5HO lamps
- Guaranteed performance with all EcoSystem controls
- Programmed rapid-start design preheats lamp cathodes ensures full-rated lamp life while dimming and cycling
- Lamps turn on to any dimmed level without going to full brightness
- Operates at 220 – 240 VAC, 50/60 Hz (CE marked)

Benefits

- With models available for T5, and T5HO, use EcoSystem H-Series ballasts throughout any space
- Digitally configured zones can be changed without re-wiring
- Responds to the Radio Powr Savr wireless daylight and occupancy/vacancy sensors, and Pico wireless controls
- 100% performance tested and burned in at factory

Models

For the latest information and model numbers, visit **www.lutron.com/europe**

Energi TriPak® components — How to design a system

EcoSystem® 5-Series LED driver

Design statement: Utilise EcoSystem 5-Series LED drivers when using the PowPak® dimming module with EcoSystem for continuous, flicker-free dimming of LEDs to 5%.



EcoSystem 5-Series LED driver dimensions

W: 54 mm

H: 31 mm

L: 215 mm

Features

- Continuous, flicker-free dimming from 100% to 5%
- Supports a wide range of current levels (up to 35 watts)
- Guaranteed performance with all EcoSystem controls
- Independently mounted driver
- Lamps turn on to any dimmed level without going to full brightness
- Operates at 220 – 240 VAC, 50/60 Hz (CE marked)

Benefits

- Works with the most common LED downlights
- Fits in 60 mm ceiling cutouts
- Digitally configured zones can be changed without re-wiring
- Responds to the Radio Powr Savr™ wireless daylight and occupancy/vacancy sensors, and Pico® wireless controls
- 100% performance tested and burned in at factory

Models

For the latest information, availability, and model numbers, visit **www.lutron.com/europe**

Note: Lutron also offers a 1% dimming LED driver. For more information on the EcoSystem LED Driver, visit **www.lutron.com/europe**

Step 2 Third-party integration control selection

PowPak® contact closure output module

Design statement: A PowPak CCO module is designed for spaces where integration with third-party equipment through contact closures is desired.



PowPak contact closure output module dimensions

W: 72 mm

H: 87 mm

D: 32 mm

Features

- Single dry contact closure device
- Receives input from up to 9 Pico® wireless controls, 6 Radio Powr Savr occupancy/vacancy sensors, and 1 Radio Powr Savr daylight sensor via Lutron reliable Clear Connect® RF technology
- Voltage: 24 V AC/DC
- Maximum load of 1 A @ 24 VAC or 0.5 A @ 24 VDC; no minimum load required

Benefits

- Button press programming to associate the module with the Radio Powr Savr sensors and Pico wireless controls

Mounting

- Module should be installed using the mounting tabs on the enclosure (screws not provided). Module can also be installed in a junction or marshalling box using the conduit nut provided. Consult local and national electrical codes for proper installation.

Models

RMK-CCO1-24-B – 1 contact closure output



Energi TriPak® components — How to design a system

Step 3 Occupancy/vacancy sensor selection

Radio Powr Savr™ wireless occupancy/vacancy sensors

Design statement: Specify a wireless occupancy/vacancy sensor to turn lights on and/or off based on the space occupancy.



**Radio Powr Savr
wireless ceiling mount
occupancy/vacancy
sensor dimensions**

W: 102 mm

H: 102 mm

D: 33 mm



**Radio Powr Savr wireless
wall/corner mount
occupancy/vacancy
sensor dimensions**

W: 46mm

H: 110mm

D: 34mm



Features

- Available in ceiling-mount, wall-mount, corner-mount and hallway options
- Lutron® XCT signal processing technology greatly enhances the performance of PIR sensors, enabling them to “see” fine motions
- Utilises Lutron reliable Clear Connect® RF technology to communicate wirelessly with wireless load controllers
- RF range: 9 m through walls
- 10-year battery life design

Benefits

- Front-accessible buttons make setup easy
- Sensors have simple test modes to verify ideal locations during installation

Models

Ceiling-mount

LRF3-OCRB-P-WH—occupancy/vacancy sensor

Wall-mount

LRF3-OWLB-P-WH—occupancy/vacancy sensor

Corner-mount

LRF3-OKLB-P-WH—occupancy/vacancy sensor

Hallway

LRF3-OHLB-P-WH—occupancy/vacancy sensor

Accessories

L-CMDPIRKIT—ceiling-mount sensor lens masking kit

L-CRMK-WH—ceiling-mount sensor recess-mounting bracket

WGOMNI-CPN3688—wire guard for ceiling-mount sensor

WGWS-CPN3688—wire guard for wall-mount and hallway sensors

STI-9618-CPN3688—wire guard for corner-mount sensor

Step 4 Daylight sensor selection

Radio Powr Savr wireless daylight sensor

Design statement: Specify a wireless daylight sensor to dim or switch zones of light in response to available daylight.



Radio Powr Savr wireless daylight sensor dimensions

W: 41 mm

H: 41 mm

D: 17 mm

Features

- Utilises Lutron reliable Clear Connect RF technology to communicate wirelessly with wireless load controllers (remote-mount modules); a load controller can communicate with only 1 daylight sensor
- RF range: 9 m through walls
- Features Lutron reliable proportional daylight open loop control
- Has a light range (0-100,000 lux) and a photopic response matches human eye
- Designed to give a linear response to changes in viewed light level
- 1 sensor is capable of switching and continuous dimming of multiple zones
- 10-year battery life

Benefits

- Simple calibration
- Multiple ceiling-mount methods available for different ceiling materials
- Front accessible test buttons make setup easy

Models

LRF3-DCRB-WH – daylight sensor



Energi TriPak® components — How to design a system

Step 5 Wireless control selection

Pico® wireless controls

Design statement: Use a Pico wireless control anywhere in the space to control loads with a touch of a button.

Handheld



Pico wireless control dimensions

W: 66 mm

H: 33 mm

D: 8 mm

Tabletop



Single pedestal

Double pedestal

Wall-mount



Single gang faceplate

Double gang faceplate



Features

- Utilises Lutron® reliable Clear Connect® RF technology to communicate wirelessly with wireless load controllers
- RF range: 9 m through wall
- Available in multiple button configurations with options for preset and raise/lower buttons
- 10-year battery life

Benefits

- Easily add a new and/or additional point of control without the need for new wires
- Easy configuration for use as a handheld control, wall-mount control, or table top control with use of the optional pedestal

Models

Pico wireless controls

PK-2B-MXX-L01 – 2-button

PK-2BRL-MXX-L01 – 2-button with Raise/Lower

PK-3B-MXX-L01 – 3-button

PK-3BRL-MXX-L01 – 3-button with Raise/Lower

Pedestals

L-PED1-XX – Single pedestal

L-PED2-XX – Double pedestal

L-PED3-XX – Triple pedestal

L-PED4-XX – Quadruple pedestal

Accessories

PFP-1-B-FXX-CPN5692 – Single gang faceplate

PFP-2-B-FXX-CPN5692 – Double gang faceplate


XX in the model number represents colour/finish code

Visit www.lutron.com/europe

Energi TriPak® — Concept drawings

Public bathroom — switching, 1 zone

Energy-saving strategies: Occupancy/vacancy sensing

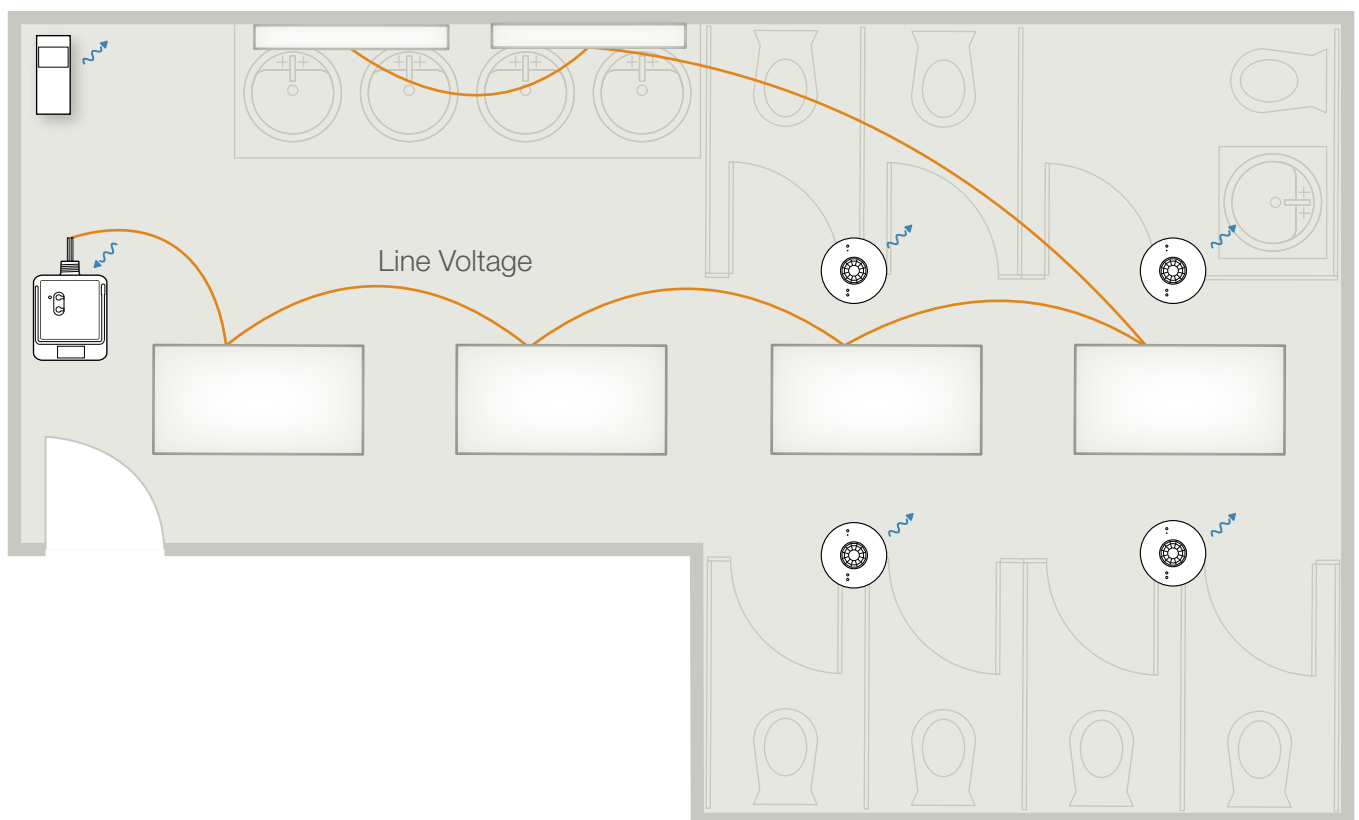

**PowPak® relay module
with Softswitch®**



**Radio Powr Savr™
occupancy/vacancy
sensor (corner-mount)**




**Radio Powr Savr
occupancy/vacancy sensor
(ceiling-mount)**

Energi TriPak® — Concept drawings

Private office – dimming, 1 zone

Energy-saving strategies: Occupancy/vacancy sensing, daylight harvesting, high-end trim, and personal dimming control

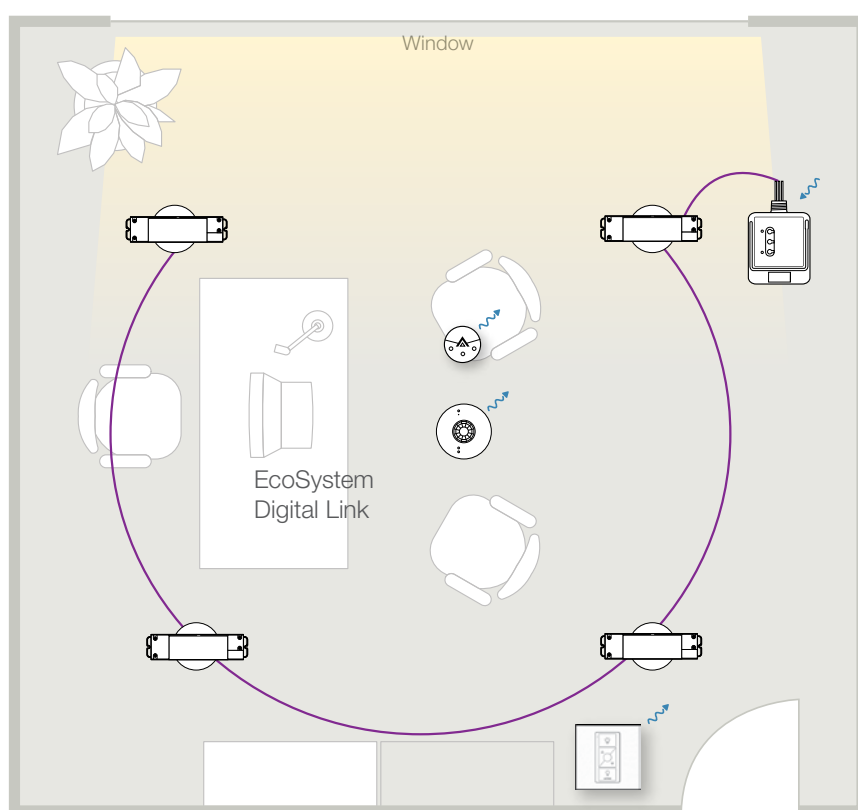

EcoSystem® 5-Series
LED driver




Radio Power Savr™
occupancy/vacancy
sensor (ceiling-mount)



Radio Power
Savr daylight
sensor

Classroom – dimming, 2 zones

Energy-saving strategies: Occupancy/vacancy sensing, daylight harvesting, high-end trim, and personal dimming control

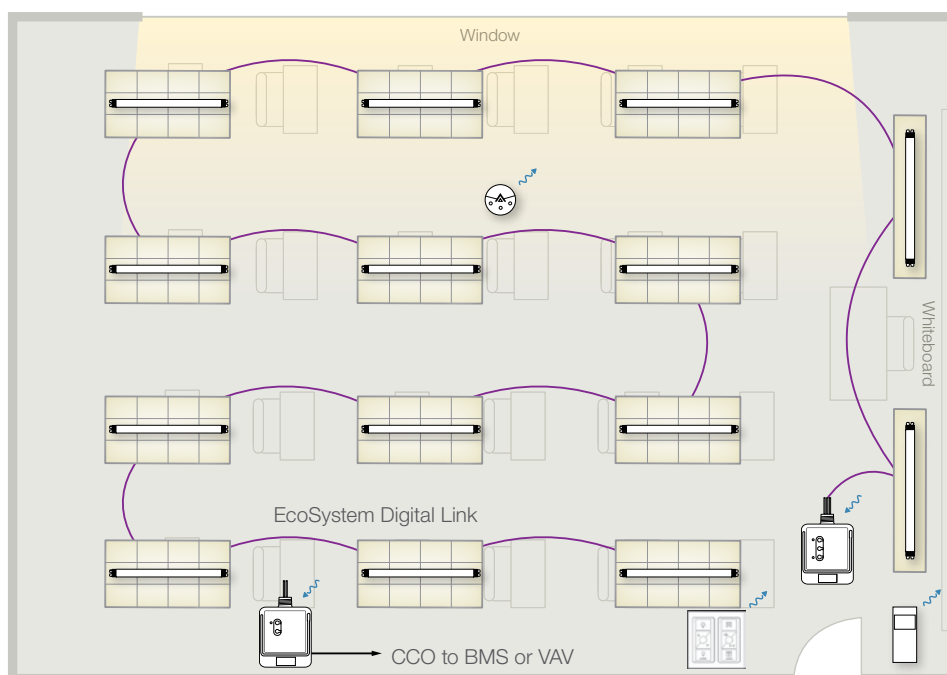

Pico wireless controls



PowPak contact closure output module



PowPak dimming module with EcoSystem



Radio Powr Savr daylight sensor



EcoSystem H-Series digital ballast




Radio Powr Savr occupancy/vacancy sensor (corner-mount)

Energi TriPak® — Concept drawings

School: Classroom/hallway – dimming, 4 zones

Classroom energy-saving strategies: Occupancy/vacancy sensing, daylight harvesting, high-end trim, and personal dimming control

Hallway energy-saving strategies: Occupancy/vacancy sensing, and high-end trim

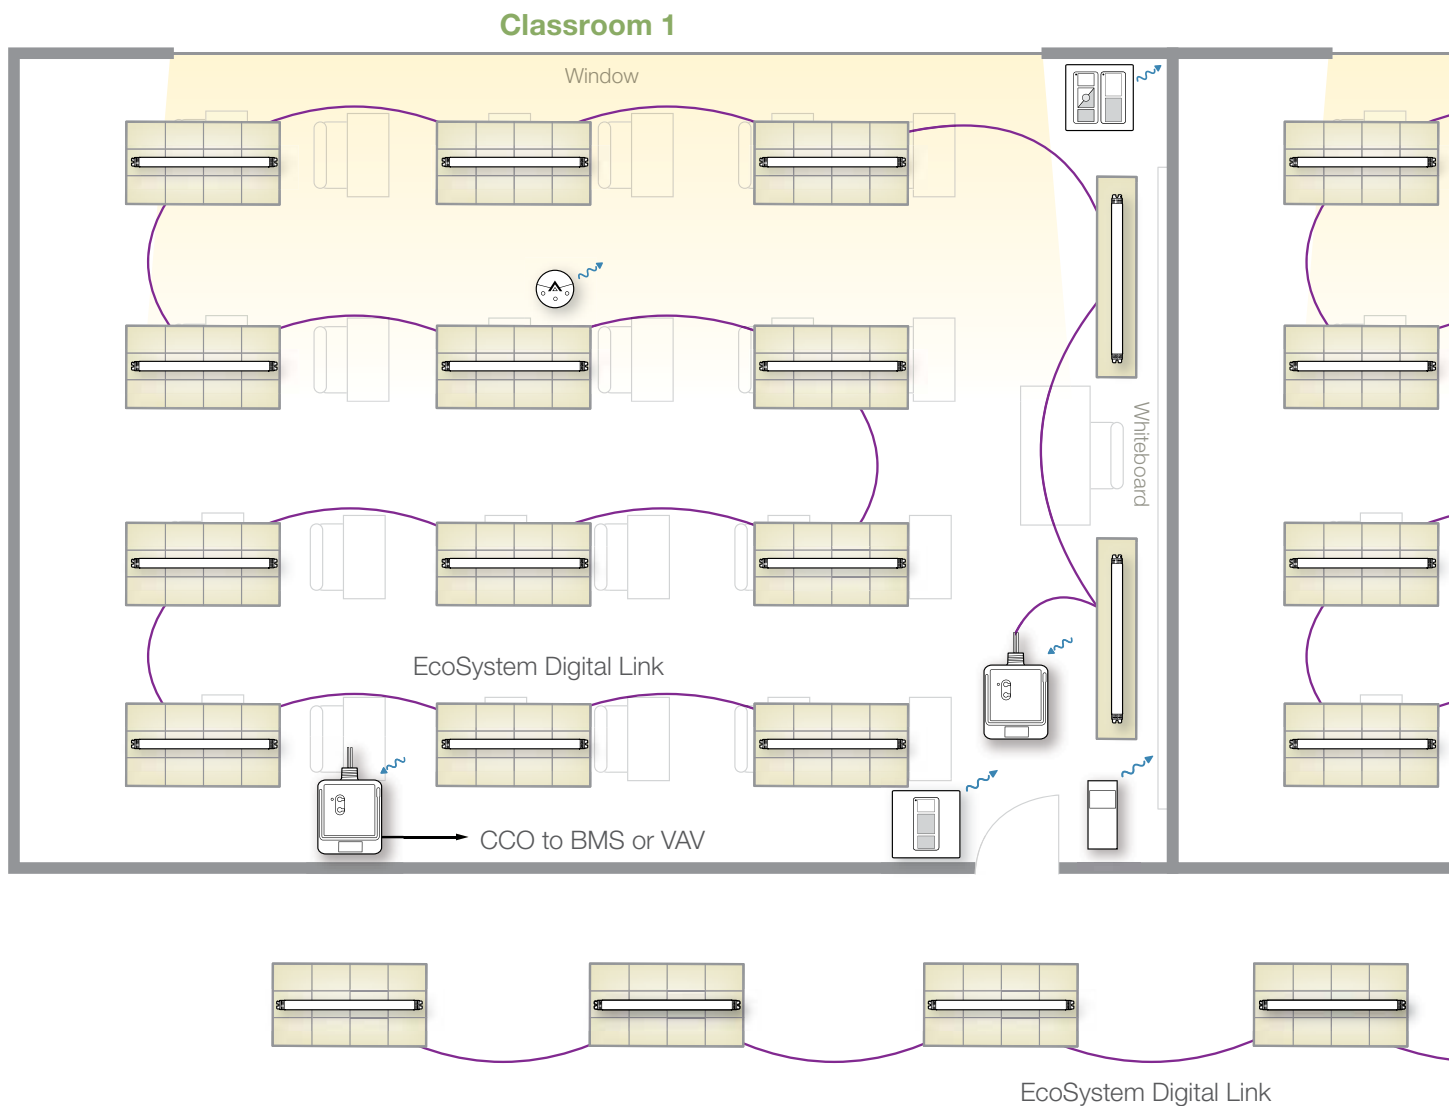

Note: The occupancy sensors in the classroom also communicate with the hallway PowPak, ensuring that the corridor lighting remains on when the classrooms are in use.




PowPak® contact closure output module

The diagram illustrates a smart building system architecture. It features a central hub (a small square device with a circular antenna) connected to various components via a network of purple lines. The components include:

- Windows:** A row of four window units, each with a horizontal bar and a small square sensor.
- Whiteboard:** A vertical rectangular unit with a horizontal bar and a small square sensor.
- EcoSystem Digital Link:** A horizontal rectangular unit with a horizontal bar and a small square sensor.
- CCO to BMS or VAV:** A small square device with a circular antenna, connected to the EcoSystem Digital Link.
- Other devices:** Several other small square devices with circular antennas are shown, connected to the central hub.


The diagram is divided into three main sections by horizontal lines. The top section is labeled "Window" and shows the window units. The middle section is labeled "Whiteboard" and shows the whiteboard unit. The bottom section is labeled "EcoSystem Digital Link" and shows the horizontal unit and the CCO to BMS or VAV device. The central hub is located in the middle of the diagram, connecting all the components.

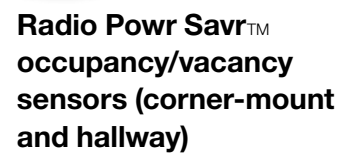

Energi TriPak® — How it works

Plug load control by switching receptacles

Plug loads, such as task lighting, computer monitors and printers, account for greater than 5% of commercial electricity usage². By utilising the PowPak® relay module with Softswitch® and a Radio Powr Savr™ occupancy/vacancy sensor to switch receptacles, energy savings can be obtained. The occupancy/vacancy sensor communicates room occupancy wirelessly to the relay module. Based on the occupancy status received, the relay module switches the power on or off to the receptacles, reducing the amount of energy consumed.

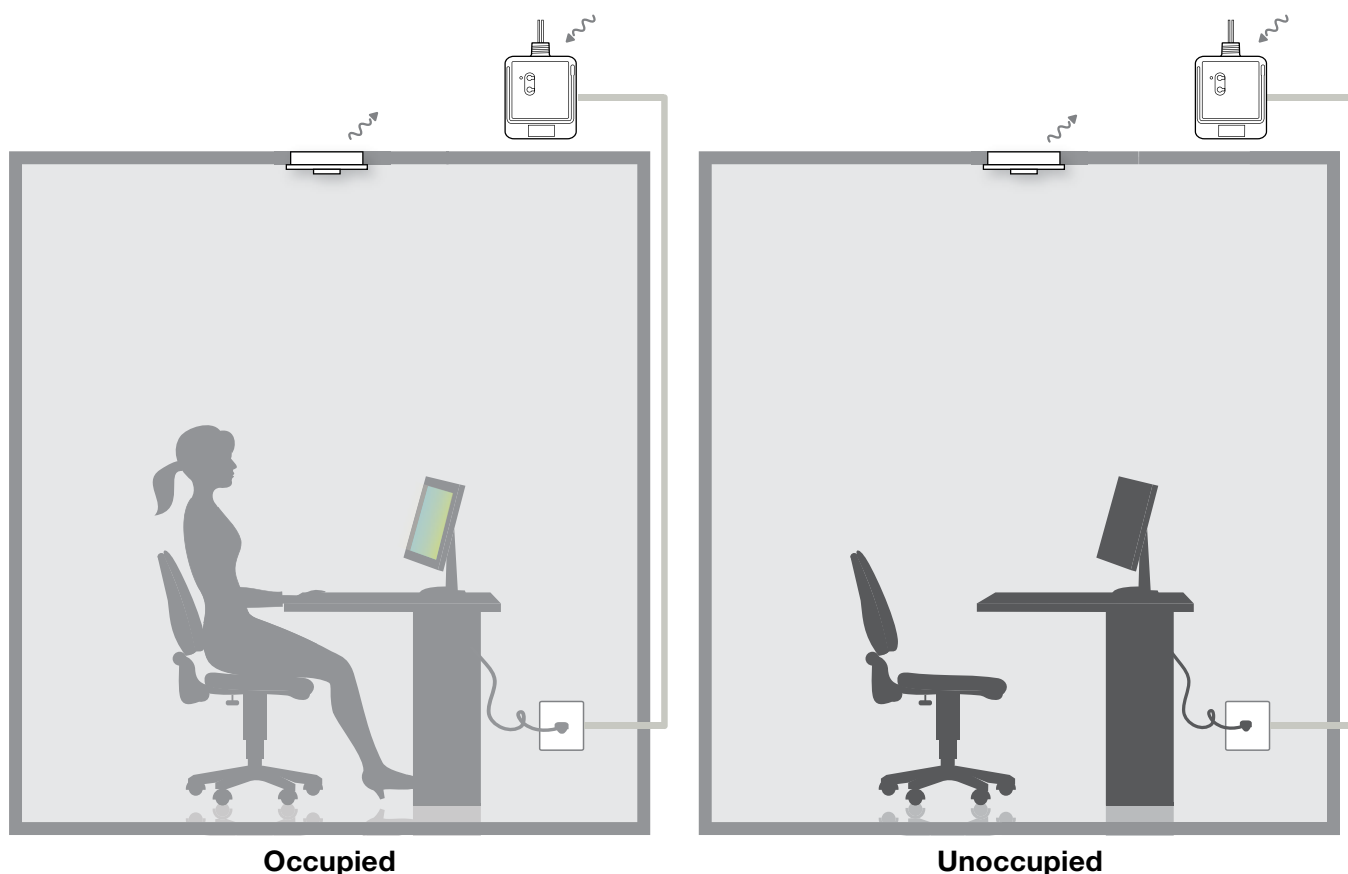

Radio Powr Savr
occupancy/vacancy
sensor (ceiling-mount)



PowPak relay module
with Softswitch




Lutron® Clear Connect™
Wireless Signal **Sent**

Lutron® Clear Connect™
Wireless Signal **Received**

Variable Air Volume (VAV) integration

In response to information received from Radio Powr Savr™ occupancy/vacancy sensor, the PowPak® contact closure output module communicates room occupancy to the VAV terminal unit. By not heating or cooling an unoccupied room, the electricity consumed by the HVAC system can be reduced.

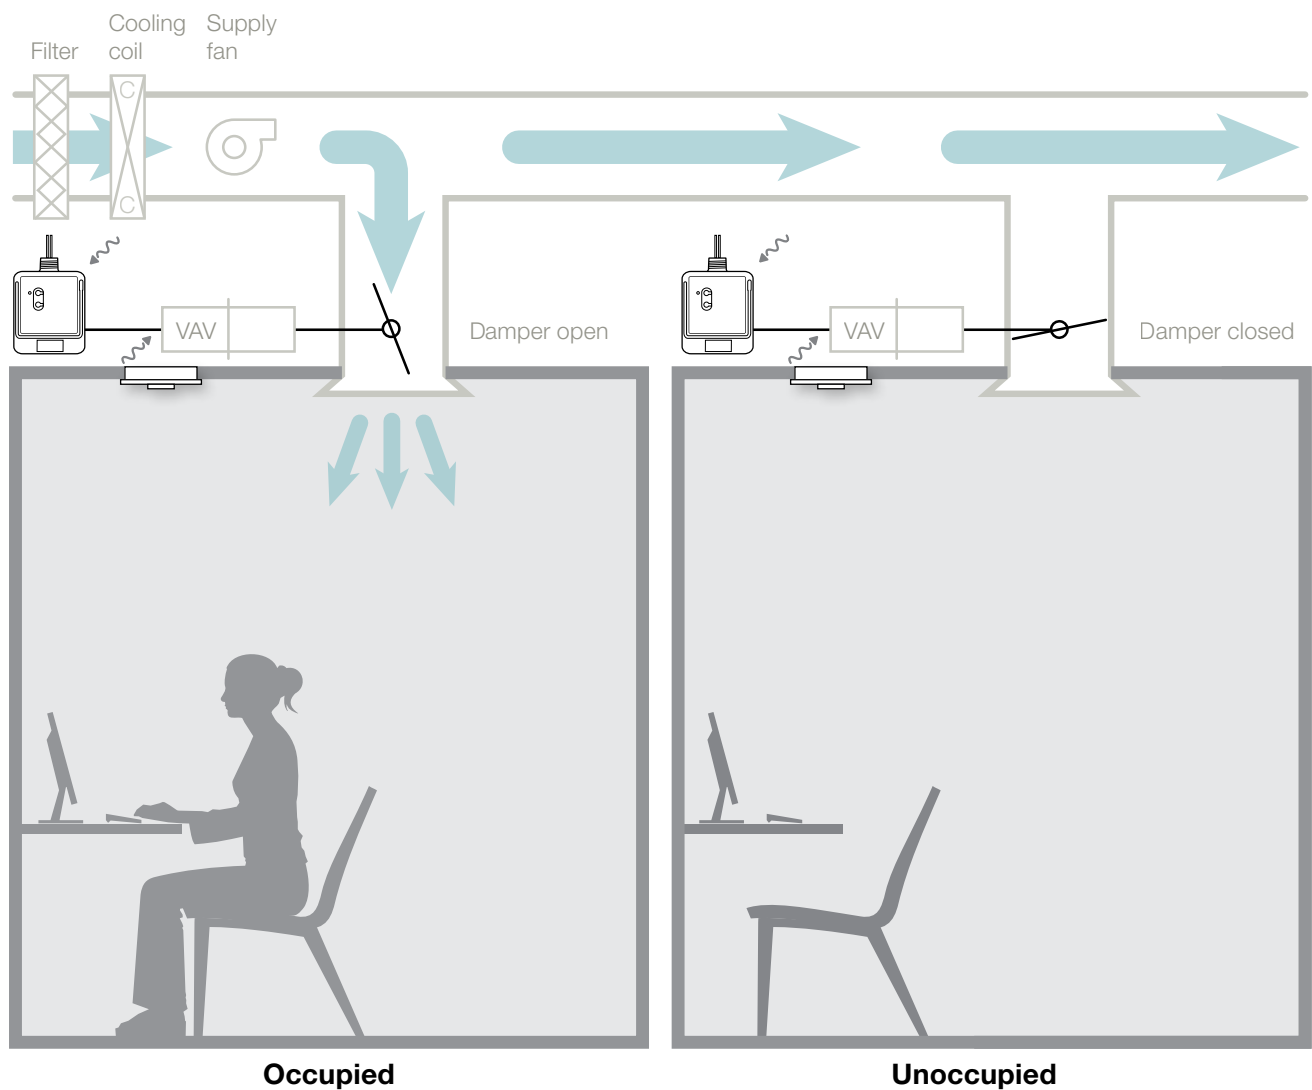

Radio Powr Savr
occupancy/vacancy
sensor (ceiling-mount)



PowPak contact closure
output module




 **Lutron® Clear Connect™**
Wireless Signal **Sent**

 **Lutron® Clear Connect™**
Wireless Signal **Received**

Energi TriPak® — Sensor coverage diagrams

Ceiling-mount, 360°

Coverage varies by ceiling height

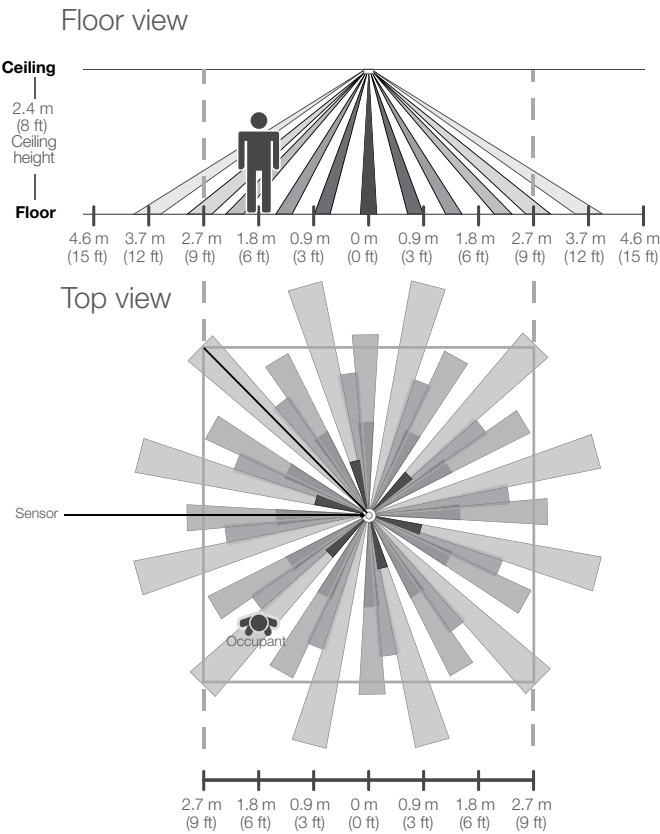

Key:

- Minor motions
- Major motion


Ceiling-mount sensor coverage chart (for sensor mounted in center of room)

Ceiling height	Max. room dimensions for complete floor coverage	Radius of coverage at floor
----------------	--	-----------------------------

2.4 m (8 ft)	5.5 x 5.5 m (18 x 18 ft)	4.0 m (13 ft)
2.7 m (9 ft)	6.1 x 6.1 m (20 x 20 ft)	4.4 m (14.5 ft)
3.0 m (10 ft)	6.7 x 6.7 m (22 x 22 ft)	4.9 m (16 ft)
3.7 m** (12 ft)	7.9 x 7.9 m (26 x 26 ft)	5.8 m (19 ft)

Wall-mount*, 180°

139 m² (1,500 ft²)—minor motion;
279 m² (3,000 ft²)—major motion

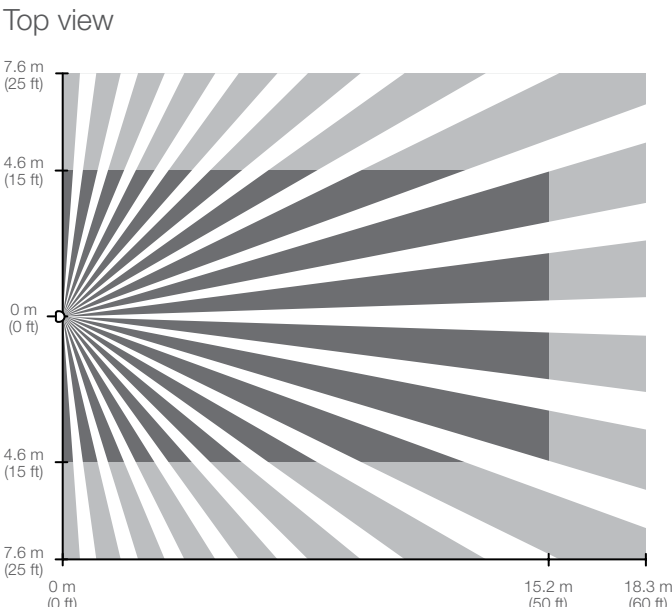


* Sensor mounting shown at 2.1 m (7 ft) mounting height should be between 1.6 and 2.4 m (6 and 8 ft)
** 3.7 m (12 ft) is the maximum mounting height allowed

Corner-mount*, 90°

**114 m² (1,225 ft²)—minor motion;
232 m² (2,500 ft²)—major motion**


Top view

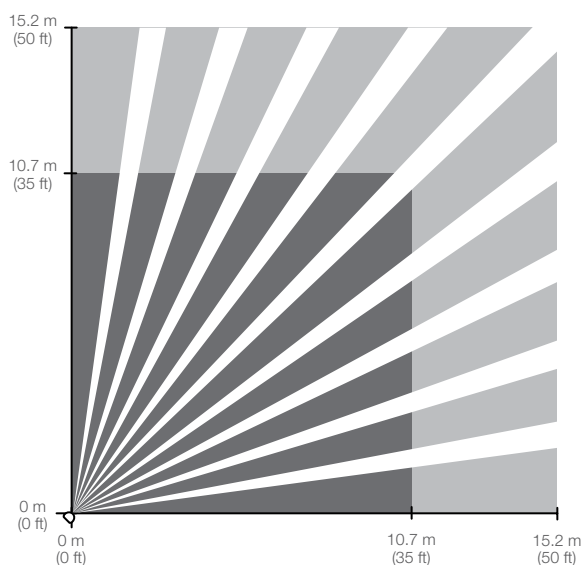

Hallway*, long narrow field of view

Coverage varies by hallway width and length

Top view

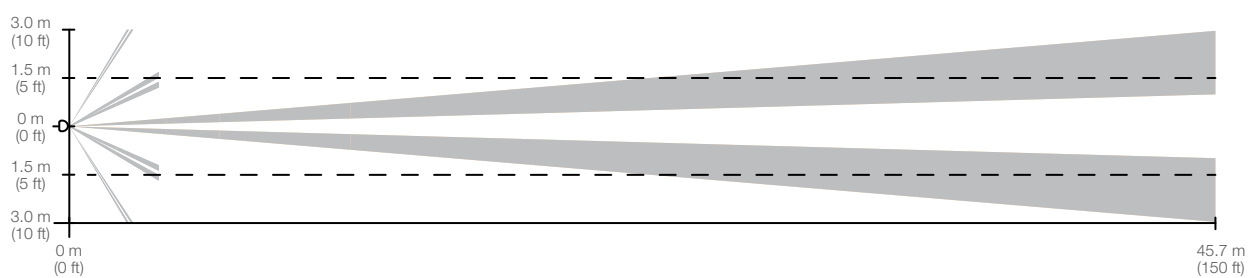

Hallway sensor maximum recommended length chart (sensor centered within hallway)

Width of hallway

Length of hallway

1.6 m or less (6 ft)	15.2 m (50 ft)
2.4 m (8 ft)	30.5 m (100 ft)
3.0 m or more (10 ft)	45.7 m (150 ft)

* Sensor mounting shown at 2.1 m (7 ft) mounting height should be between 1.6 and 2.4 m (6 and 8 ft)

Ordering information

Model number	Description
PowPak® relay module	
RMK-5R-DV-B	5 A general purpose switch
RMK-16R-DV-B	16 A general purpose switch with Softswitch®
PowPak dimming module with EcoSystem®	
RMK-ECO32-DV-B	Controls up to 32 EcoSystem H-Series ballasts, EcoSystem LED drivers and/or EcoSystem 5-Series LED drivers
Rania® RF switch	
RS-SA05-B-FXX-M	Rania, RF switch, frameless
RS-SA05-B-IXX-M	Rania, RF switch, frame and insert faceplate
RS-SA05-B-BXX-M	Rania, RF switch, black frame/metal insert faceplate
Rania RF switch package	
RRF-SA05-B-FXX-M	(1) Rania RF switch (frameless) and (1) Radio PowrSavr ceiling-mount occupancy/vacancy sensor
RRF-SA05-B-IXX-M	(1) Rania RF switch (frame/insert faceplate) and (1) Radio Powr Savr ceiling-mount occupancy/vacancy sensor
PowPak contact closure module	
RMK-CCO1-24-B	(1) contact closure output
Radio Powr Savr™ occupancy/vacancy sensors	
LRF3-OCRB-P-WH	Ceiling-mount, 360° field of view, occupancy/vacancy sensor
LRF3-OWLB-P-WH	Wall-mount, 180° field of view, occupancy/vacancy sensor
LRF3-OKLB-P-WH	Corner-mount, 90° field of view, occupancy/vacancy sensor
LRF3-OHLB-P-WH	Hallway occupancy/vacancy sensor
Accessories	
L-CMDPIRKIT	Ceiling-mount sensor lens masking kit
L-CRMK-WH	Ceiling-mount sensor recess-mounting bracket
WGOMNI-CPN3688	Wire guard for ceiling-mount sensor
WGWS-CPN3688	Wire guard for wall-mount and hallway sensors
STI-9618-CPN3688	Wire guard for corner-mount sensor
Radio Powr Savr daylight sensor	
LRF3-DCRB-WH	Ceiling-mount daylight sensor

Model number	Description
--------------	-------------

Pico® wireless controls

PK-2B-MXX-L01	2 Button
PK-2BRL-MXX-L01	2 Button with Raise/Lower
PK-3B-MXX-L01	3 Button
PK-3BRL-MXX-L01	3 Button with Raise/Lower

Accessories

L-PED1-XX	Pico wireless control single pedestal
L-PED2-XX	Pico wireless control double pedestal
L-PED3-XX	Pico wireless control triple pedestal
L-PED4-XX	Pico wireless control quadruple pedestal
PFP-1-B-FXX-CPN5692	Single gang faceplate
PFP-2-B-FXX-CPN5692	Double gang faceplate

EcoSystem H-Series ballasts

EHD T514 M E 1 10	T5, 14 W, 1-lamp, 220-240 V, 1.0 ballast factor
EHD T514 M E 2 10	T5, 14 W, 2-lamp, 220-240 V, 1.0 ballast factor
EHD T521 M E 1 10	T5, 21 W, 1-lamp, 220-240 V, 1.0 ballast factor
EHD T521 M E 2 10	T5, 21 W, 2-lamp, 220-240 V, 1.0 ballast factor
EHD T524 M E 1 10	T5, 24 W, 1-lamp, 220-240 V, 1.0 ballast factor
EHD T524 M E 2 10	T5, 24 W, 2-lamp, 220-240 V, 1.0 ballast factor
EHD T528 M E 1 10	T5, 28 W, 1-lamp, 220-240 V, 1.0 ballast factor
EHD T528 M E 2 10	T5, 28 W, 2-lamp, 220-240 V, 1.0 ballast factor
EHD T539 M E 1 10	T5, 39 W, 1-lamp, 220-240 V, 1.0 ballast factor
EHD T539 M E 2 10	T5, 39 W, 2-lamp, 220-240 V, 1.0 ballast factor
EHD T554 M E 1 10	T5, 54 W, 1-lamp, 220-240 V, 1.0 ballast factor
EHD T554 M E 2 10	T5, 54 W, 2-lamp, 220-240 V, 1.0 ballast factor

XX in the model number represents colour/finish code:

Pico wireless controls matte colours — AW = Arctic White, BL = Black

Pedestal gloss colours — WH = White, BL = Black

Faceplate colours and metal finishes —

AW = Arctic White, MN = Midnight, BN = Bright Nickel,

SN = Satin Nickel, BB = Bright Brass, SB = Satin Brass

Rania RF switch and Rania RF switch packages matte and metallic colours — AW = Arctic White, MC = Mica, AR = Argentum

Rania RF switch metal finishes — BB = Bright Brass, BC = Bright Chrome,

BN = Bright Nickel, AU = Gold, SB = Satin Brass, SC = Satin Chrome, SN = Satin Nickel,

QB = Antique Brass, QZ = Antique Bronze

Sources

- 1 Compared with manual (non-automated) controls, up to 60% lighting energy savings is possible on projects that utilise all of the lighting control strategies (occupancy sensing, high-end trim, personal control and daylight harvesting). Actual energy savings may vary, depending on prior occupant usage, among other factors.
- 2 Bertoldi, P. et al. 2012. Energy Efficiency Status Report 2012. Joint Research Centre.
- 3 Lutron study based on reduction in heating (base 60°F) and cooling (base 55°F) degree days with a 2°F thermostat setback and 60% space un-occupancy. EnergyPlus modeling simulations were conducted and predicted similar savings.
- 4 Light Right Consortium. 2003. "Lighting Quality & Office Worker Productivity," Research Study, Albany, N.Y.
- 5 VonNieda B, Maniccia D, & Tweed A. 2000. An analysis of the energy and cost savings potential of occupancy sensors for commercial lighting systems. Proceedings of the Illuminating Engineering Society. Paper #43.
- 6 Reinhart CF. 2002. Effects of interior design on the daylight availability in open plan offices. Study of the American Commission for an Energy Efficient Environment (ACE) Conference Proceedings. To achieve maximum lighting savings, automated shades are utilised.
- 7 Williams A, et al. 2012. Lighting Controls in Commercial Buildings. Leukos. 8(3) pg 161-180.
- 8 Galasiu AD, et al. 2007. Energy saving lighting control systems for open-plan offices: A field study. Leukos. 4(1) pg 7-29.
- 9 Ecos. 2011. Commercial office plug load savings assessment. California Energy Commission PIER Program.
- 10 Phillips, R. W. (1997). Educational Facility Age and the Academic Achievement of Upper Elementary School Students. Unpublished Doctoral Dissertation. University of Georgia.

WORLDWIDE HEADQUARTERS

Lutron Electronics Co., Inc.
7200 Suter Road
Coopersburg, PA 18036-1299
USA
Toll-free: 1 888 LUTRON1
TEL: +1 610 282 3800
FAX: +1 610 282 1243
intsales@lutron.com

ASIAN HEADQUARTERS

Lutron GL Ltd.
#07-03 Tower Fifteen
15 Hoe Chiang Road
Singapore 089316
TEL: +65 6220 4666
FAX: +65 6220 4333
lutronsea@lutron.com

EUROPEAN HEADQUARTERS

Lutron EA Ltd.
6 Sovereign Close
London, E1W 3JF
UK
FREEPHONE: 0800 282 107
TEL: +44 (0)20 7702 0657
FAX: +44 (0)20 7480 6899
lutronlondon@lutron.com

INTERNATIONAL OFFICES

Brazil: São Paulo

TEL: +55 11 4327 3800

China: Beijing

TEL: +86 10 5877 1818

China: Hong Kong

TEL: +852 2104 7733

China: Shanghai

TEL: +86 21 6288 1473

France: Paris

TEL: +33 1 56 59 16 64

Germany: Berlin

TEL: +49 (0)30 971045-90

India: Bangalore

TEL: +91 80 4030 0485

India: Mumbai

TEL: +91 22 4070 0867

India: Delhi (NCR Region)

TEL: +91 124 471 1900

Italy: Milan

FREEPHONE: 800 979 208

Japan: Tokyo

TEL: +81 3 5575 8411

Singapore

TEL: +65 6220 4666

Spain: Barcelona

TEL: +34 93 496 57 42

Spain: Madrid

TEL: +34 91 567 84 79

UAE: Dubai

TEL: +971 4 299 1224



www.lutron.com/energitrust

