

CoreLine Recessed

RC120B LED37S/840 PSU W60L60

RC120B - LED Module, system flux 3700 lm - Power supply unit

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Recessed range of LED products can be used to replace functional luminaires in general lighting applications. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Product data

• General information

Product family code	RC120B [RC120B]
Number of light sources	2 [2 pcs]
Lamp family code	LED37S [LED Module, system flux 3700 lm]
Lamp colour code	840 [840 cool white]
Light source replaceable	No [No]
Driver/power unit/transformer	PSU [Power supply unit]
Driver included	Yes [Yes]
Optical cover/lens type	PC-LIN-SAT [Polycarbonate linear satinized]
Emergency lighting	No [-]
Dimmable	No [No]
Connection	PIP [Push-in connector and pull relief]
Cable	No [-]
Protection class IEC	CLI [Safety class I]
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Colour	WH [White]
Glow-wire test	850/30 [Temperature 850 °C, duration 30 s]
Flammability mark	F [For mounting on normally flammable surfaces]
Safety device	SC [Safety cable]
CE mark	CE [CE mark]

• Electrical

Input voltage	220-240 V [220 to 240 V]
Input frequency	50-60 Hz [50 to 60 Hz]

• Mechanical

Geometry	W60L60 [Width 0.60 m, length 0.60 m]
Housing material	STL [Steel]
Reflector material	STL [Steel]
Optical cover/lens material	PC [Polycarbonate]

• Initial perform. (IEC compliant)

Initial input power	42 W [42 W]
Initial luminous flux	3700 Lm
Initial LED luminaire efficacy	88 Lm/W
Lamp colour temperature	4000 [4000 K]
Colour Rendering Index	≥80 [≥80]
Initial chromaticity	(0.38, 0.38) SDCM <3.5

• Over time perform. (IEC compliant)

Median useful life L90B50	15000 hr
Median useful life L80B50	30000 hr
Driver failure rate at 5000 h	1.5 %

• Application conditions

Average ambient temperature	T25 [+25 °C]
Ambient temperature range	+10 to +40°C [+10 to +40 °C]
Maximum dim level	- [Not applicable]

PHILIPS

CoreLine Recessed

Suitable for random switching Yes [Yes (relates to presence/movement detection and daylight harvesting)]


Packs per outerbox 1
Bar code on outerbox - EAN3 8717943897551
Logistic code(s) - 12NC 910503695118
Net weight per piece 2.898 kg

• Product Data

Order code 897551 00
Full product code 871794389755100
Full product name RC120B LED37S/840 PSU W60L60
Order product name RC120B LED37S/840 PSU W60L60
Pieces per pack 0



Dimensional drawing

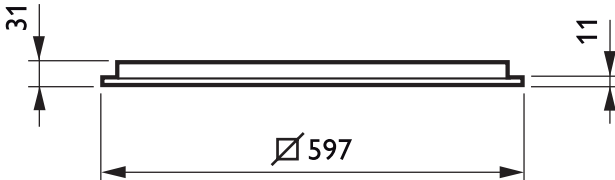

RC120B LED37S/840 PSU W60L60



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 21
data subject to change