


Liteplan

3W LED Emergency Downlight S-PLM/4/LED/40/NL/W

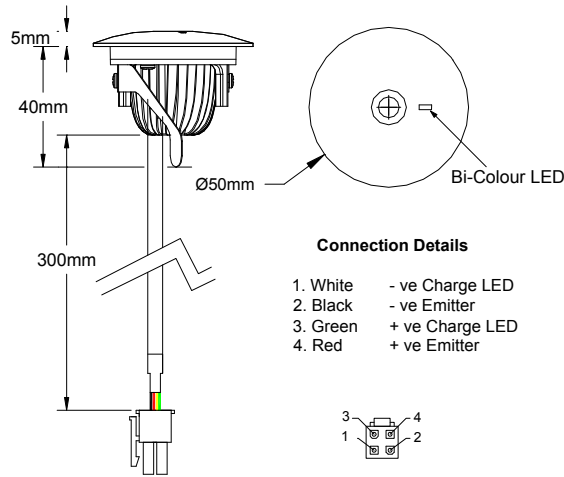

A Constant Current 110° wide beam 3 Watt LED c/w bi-colour charge LED. Available in either:

- * W - White (RAL9016)
- * S - Silver (RAL9006)
- * B - Black (RAL9005)

Input Voltage	4V DC Max
Power Rating	3 Watts
Max. Forward Current	700mA
Light Source	Edison EDEW Series
Beam Angle	110°
Cut Out	43mm
Light Source Colour	Cool White
Colour Temperature	6000K
Emitter Luminous Flux	155 Lumens
General CRI	71.5
Tc Max	80°C LED Backplate
Wiring Method	Series connection only via C4201 Series Plug
Dimensions	50mm x 45mm (Min Void Depth 40mm)
Weight	57g

Spacing Table

Mounting Height	To Wall		Between Fittings	
	0.5	1.0	0.5	1.0
2.5	4.1	3.3	9.5	8.1
3.0	4.5	3.5	10.6	8.8
4.0	4.9	3.5	12.1	9.6
5.0	5.0	3.1	13.1	9.8
6.0	4.9	2.3	13.8	9.6
8.0	3.7	-	13.8	6.3

Liteplan holds ISO 9000 accreditation for the appropriate categories of emergency lighting supplied by the Company.