

MR16 CONSTANT CURRENT



OUTPUT RANGE: VIVID SERIES	485 - 580 lumen
BEAM ANGLE RANGE	10°, 25°, 36°
COLOR TEMPERATURE RANGE	2700K, 3000K, 4000K
APPLICATION	LED constant current lamp for indoor applications



POINT SOURCE OPTICS

Exceptional beam control enables unique 10° narrow spot and smooth uniform beams

Single light source, single crisp shadow

VP₃ VIVID COLOR & VP₃ NATURAL WHITE

VIVID series provides accurate color rendering across the visible spectrum from 400nm to 700nm, with CRI/95*, R9/95*, Rf/90, Rg/100

Whiteness rendering matches or exceeds that of halogen and incandescent sources at 2700K and 3000K

ENERGY EFFICIENCY & LONG LIFE

Rated lifetime of 35,000 hours. 3 year warranty

CERTIFICATIONS

FCC Title 47 Part 15B, RoHS, CE



HIGHLY COMPATIBLE

Narrow spot compatible with Soraa SNAP System accessories

Geometrically compatible with standard MR16 fixtures

This lamp is not recommended for use in enclosed fixtures or for use with front glass cover

Suitable for damp locations

INTENDED USE AND APPLICATIONS

Intended for use in MR16 compatible recessed downlights, track lighting and other indoor applications

Designed to work with external constant current drive


STORAGE CONDITIONS

Maximum storage temperature of 90°C


GENERAL SPECIFICATIONS

Form Factor	Operating Temperature	Operating Current	Forward Voltage
Width: 50.1mm (1.97")	Minimum: -40°C (ambient)	Minimum: 20mA	Minimum: 26.6V
Height: 45.5mm (1.79")	Typical: 85°C - 95°C (base)	Typical: 300mA	Typical: 28.4V
Weight: 44g	Maximum: 100°C (base)	Maximum: 350mA	Maximum: 29.6V

DIMENSIONS

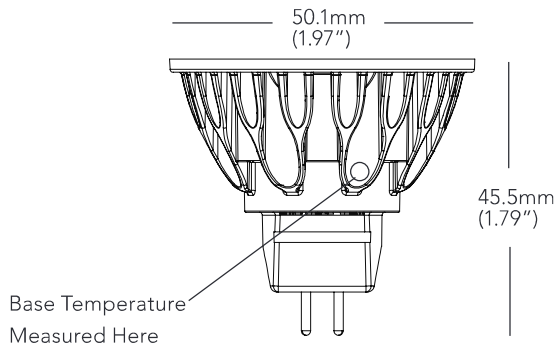


COLOR RENDERING

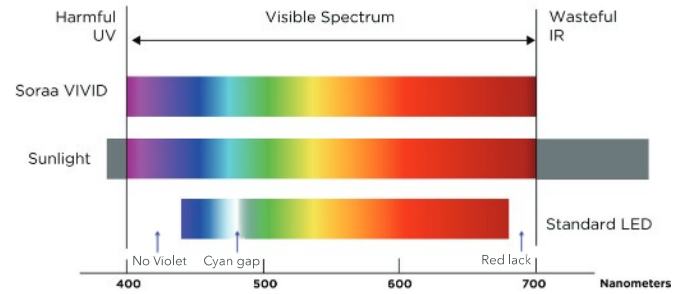

10 DEGREE BEAM

PHOTOMETRICS: 95CRI, 3000K AT 300MA, 85°C


Beam Dia at 50% Intensity (m)	Field Dia at 10% Intensity (m)	Lux (% of Intensity)
0.2	0.4	100%
0.3	0.7	25%
0.5	1.1	11%
0.7	1.4	6%
0.9	1.8	4%

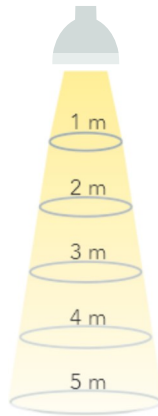

25 DEGREE BEAM

PHOTOMETRICS: 95CRI, 3000K AT 300MA, 85°C


Beam Dia at 50% Intensity (m)	Field Dia at 10% Intensity (m)	Lux (% of Intensity)
0.4	0.7	100%
0.9	1.5	25%
1.3	2.2	11%
1.8	2.9	6%
2.2	3.6	4%

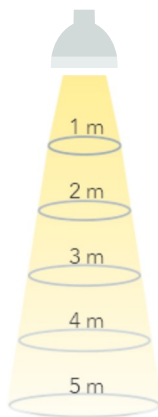

36 DEGREE BEAM

PHOTOMETRICS: 95CRI, 3000K AT 300MA, 85°C

Beam Dia at 50% Intensity (m)	Field Dia at 10% Intensity (m)	Lux (% of Intensity)
0.6	1.1	100%
1.3	2.2	25%
1.9	3.3	11%
2.6	4.3	6%
3.2	5.4	4%

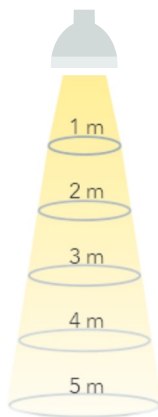

Note: Lux may be calculated by multiplying the peak Intensity of the desired model number by the percentage in the tables above
Footcandle multiplication factors for other CCTs 2700K: 0.93, 4000K: 1.04

SPECIFICATIONS BY MODEL NUMBER* SORAA LED MR16 CONSTANT CURRENT

Model #	Product Code	CCT (K)	Beam Angle	Field Angle	Peak Intensity	Total Flux (Lm)	Efficacy (Lm/W)	90° Lumens	McA	EI	SNAP
VIVID SERIES											
SM16C-CC1-10D-927-03-S3	01355	2700	10	17	7120	485	57	430	3	A	YES
SM16C-CC1-25D-927-03-S3	01357	2700	25	39	2860	515	60	485	3	A	-
SM16C-CC1-36D-927-03-S3	01359	2700	36	54	1360	515	60	470	3	A	-
SM16C-CC1-10D-930-03-S3	01361	3000	10	17	7700	525	62	465	3	A	YES
SM16C-CC1-25D-930-03-S3	01363	3000	25	39	3060	550	65	520	3	A	-
SM16C-CC1-36D-930-03-S3	01365	3000	36	54	1460	550	65	505	3	A	-
SM16C-CC1-10D-940-03-S3	01367	4000	10	17	8060	550	65	485	4	A	YES
SM16C-CC1-25D-940-03-S3	01369	4000	25	39	3220	580	68	550	4	A	-
SM16C-CC1-36D-940-03-S3	01371	4000	36	54	1520	580	68	530	4	A	-

CCT: Correlated Color Temperature **McA:** White Point Accuracy in McA step **SNAP:** SORAA SNAP System Compatible **EI:** Energy Efficiency Index

*Specifications are at 300mA and 85°C body temperature

TYPICAL FORWARD VOLTAGE CHARACTERISTICS

Current	Body Temperature				
	25°C	45°C	65°C	85°C	105°C
50mA	27.7	27.3	26.9	26.6	26.3
150mA	28.7	28.2	27.8	27.5	27.2
200mA	29.0	28.5	28.2	27.8	27.6
250mA	29.3	28.8	28.5	28.2	27.9
300mA	29.6	29.1	28.8	28.4	28.2

LIGHT OUTPUT NORMALIZED TO 300mA, 85°C

Current	Body Temperature				
	25°C	45°C	65°C	85°C	105°C
50mA	0.19	0.19	0.19	0.18	0.18
150mA	0.55	0.55	0.54	0.53	0.59
200mA	0.72	0.71	0.70	0.69	0.67
250mA	0.89	0.88	0.86	0.85	0.82
300mA	1.04	1.04	1.02	1.00	0.97


SERIES/CCT

COLOR ACCURACY


WHITENESS INDEX

SPECTRAL POWER DISTRIBUTION


**VIVID
2700K**



Rf: 90, Rg: 100, Rfh1: 95




Rw: 120

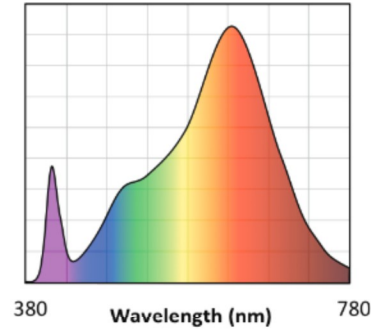


CRI: 95, R9: 95


**VIVID
3000K**



Rf: 90, Rg: 100, Rfh1: 95




Rw: 120

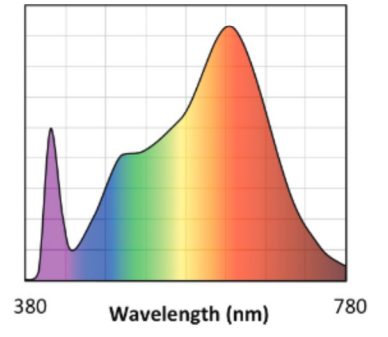


CRI: 95, R9: 95


**VIVID
4000K**



Rf: 90, Rg: 100, Rfh1: 95



Rw: 70

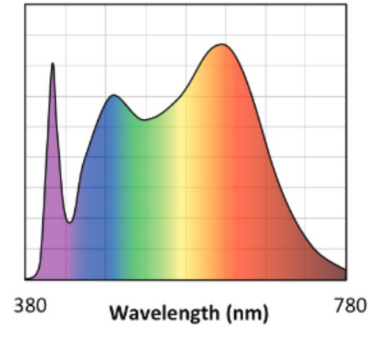

CRI: 92, R9: 95