


- LED recessed spotlight with aluminium housing and spring mounting clips
- High performance replacement for halogen spotlights
- 30° tilting angle
- Dimmable
- Lifetime of 30,000 hrs



Order Code	52406
General Data	
Type of Installation	Recessed
Housing Material	Aluminum
Housing Color	Chrome
Protection Class	IP20
Geometric Data	
Height (mm)	55
Outer Diameter (mm)	112
Inner Diameter (mm)	75
Weight (g)	360
Electric Data	
Wattage (W)	12.0
Voltage (V)	220-240 / ext. driver
Power Factor	0.90
Operating Frequency (Hz)	50-60
Safety Class	II
Photometric Data	
Luminous Flux (lm)	720
Luminous Flux 90° (lm)	685
CRI	≥ 80
CCT (K)	3000
Luminous Efficiency (lm/W)	60
Luminous Intensity (cd)	3150
Beam Angle (°)	25
Lifespan	
Lifetime (hrs)	30,000
Switching Cycle	60,000
Dimmability	Yes
Energy Efficiency Class	A



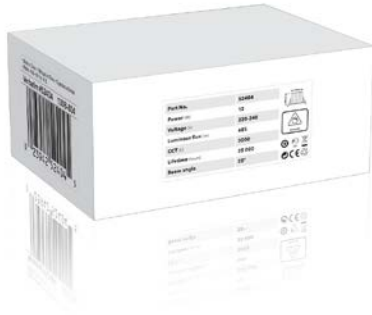

Order Code	52406
Product Description	LED Downlight 12W 3000K ww 685lm 25° Chrome DIM

Technical Packaging Details

Barcode	023942524069
EAN 128	(02)00023942524069(37)04(91)162
EAN 14	50023942524064
Pack Dimensions (HxWxL)	168 mm x 120 mm x 73 mm
Pack Weight	450
Carton Qty (Shipping Unit)	4
Carton Dimensions (HxWxL)	352 mm x 250 mm x 95 mm
Cartons/Pallet	90
Layers/Pallet	10
Units/Pallet	360

Photometric Diagram

52406

