

## Verbatim LED Downlight 104mm 11W 4000K 650lm

- Energy saving alternative to CFL downlights
- 30,000 hours lifetime
- Direct mains voltage connection (220-240V)
- Light output of 650lm
- 4000K neutral white light



<b>Product Number</b>		<b>52424</b>
<b>General Data</b>		
Housing material	Aluminium, Polycarbonate Cover	
Housing colour	White	
Protection class	IP20	
Dimmable	no	
<b>Geometric Data</b>		
Length (mm)	52	
Outer diameter (mm)	104	
Inner diameter (mm)	90	
Weight (g)	174	
<b>Electric Data</b>		
Wattage (W)	11	
Voltage (V)	220-240	
Power Factor	0.90	
Operating Frequency (Hz)	50-60	
Safety Class	Class III	
Power supply	external	
<b>Photometric Data</b>		
Luminous Flux (lm)	650	
CRI	80	
CCT (K)	4000	
Luminous Efficacy (lm/W)	59.09	
Luminous Intensity (cd)	480	
Beam Angle (°)	90	
<b>Lifespan</b>		
Lifetime (hrs)	30,000	
Switching Cycle	20,000	
Glow wire test	650°C	




30/03/2015

Lifestyle image




Technical Drawings

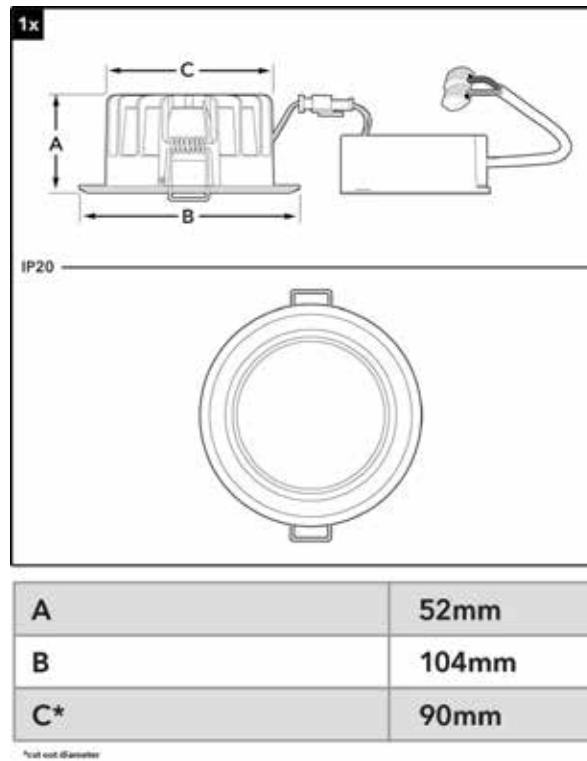

30/03/2015

### Energy Rating

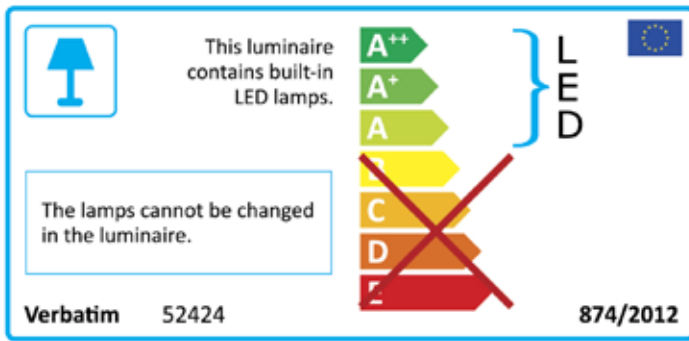

### Technical Packaging Details

**Barcode**

023942524243

**EAN 128**

(02)00023942524243(37)04(91)204

**EAN 14**

50023942524248

**Pack Dimensions(HxWxL)**

83 x 110 x 110 (mm)

**MOQ**

4

**Carton Dimensions (HxWxL)**

180 x 120 x 234 (mm)

**Cartons/Pallet**

135



**Layers/Pallet**

5

**Units/Pallet**

540

### Photometric Diagrams

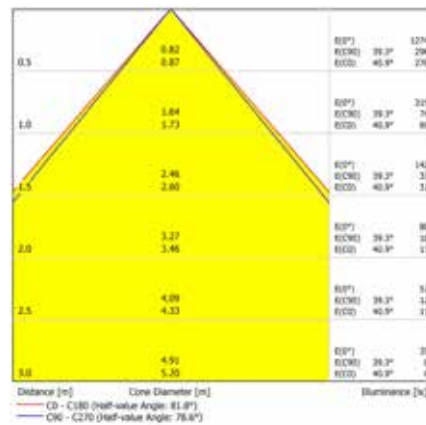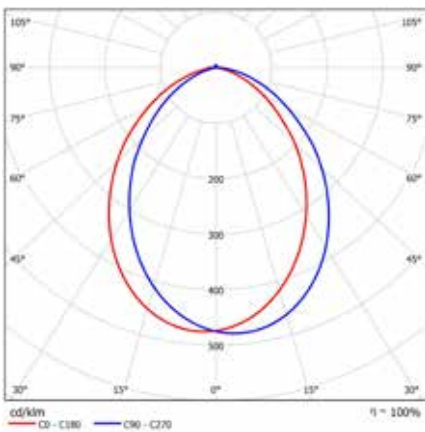

30/03/2015