

Verbatim LED PAR16 GU10 7W 3000K 350lm 3000K Warm White 350 LM DIM

- GU10 Socket
- 220 - 240 V Voltage
- 30,000 hours Lifetime
- Dimmable
- 86% Energy Saving
- Equivalent to 51W incandescent bulb


Product Number	52301
General Data	
Lamp Socket	GU10
Electric Data	
Wattage (W)	7
Wattage Equivalent (W)	51
Voltage (V)	220 - 240 V
Dimmable	yes
Power Factor	0.7
Operating Frequency (Hz)	50-60
Geometric Data	
Length (mm)	60
Diameter (in mm)	50
Weight (g)	65
Photometric Data	
Luminous Flux 90° Cone (lm)	350
CRI	80
CCT (K)	3000
Luminous Intensity (cd)	680
Beam Angle (°)	36
Luminous Efficacy (lm/W)	50
Lifetime (hrs)	30,000
Switching Cycle	20,000



Verbatim.




Mitsubishi Chemical Holdings Group

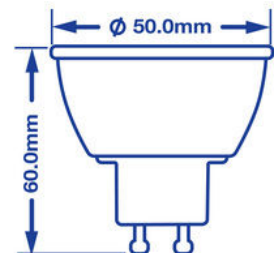

29/05/2014


Photometric Diagrams

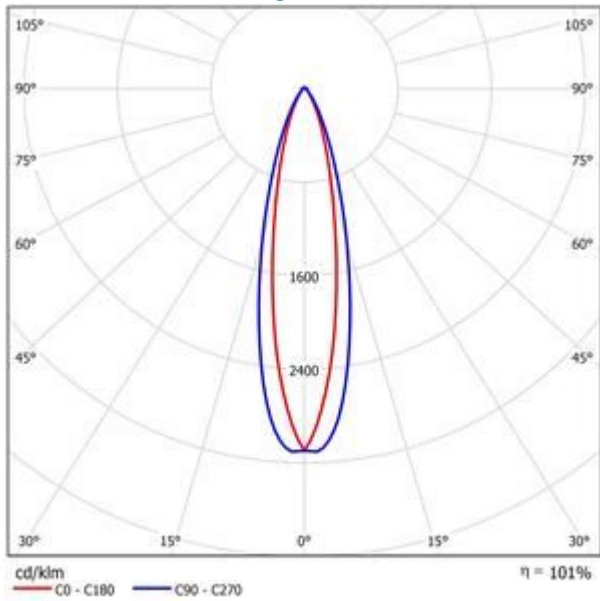

Distance [m]	Cone Diameter [m]	E(0°) [lx]	E(C90) [lx]	E(C0) [lx]
0.5	0.25 0.18	5743	14.0° 2647	10.2° 2744
1.0	0.50 0.36	1436	14.0° 662	10.2° 686
1.5	0.75 0.54	638	14.0° 294	10.2° 305
2.0	1.00 0.72	359	14.0° 165	10.2° 172
2.5	1.25 0.90	230	14.0° 106	10.2° 110
3.0	1.50 1.08	160	14.0° 74	10.2° 76

Distance [m] Cone Diameter [m] Illuminance [lx]
 — C0 - C180 (Half-value Angle: 20.4°)
 — C90 - C270 (Half-value Angle: 28.0°)

Energy Rating

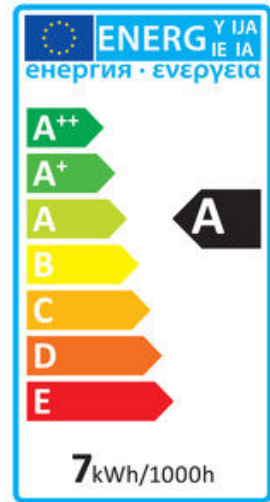

Technical Packaging Details

Barcode

023942523017

EAN 128

(02)00023942523017(37)10(91)204

EAN 14

50023942523012

Pack Dimensions(HxWxL)

H85 x W53 x L53

MOQ

10

Carton Dimensions (HxWxL)

H98 x W120 x L280

Cartons/Pallet

192

Layers/Pallet

8

Units/Pallet

1920

29/05/2014