

PRODUCT DATASHEET

NIGHTLUX Hall White

NIGHTLUX Hall | Mobile nightlights with motion sensor and tilt function, battery-powered



AREAS OF APPLICATION

- For a very large range of uses
- Indoor and outdoor
- Entrances / Hallways
- Corridors

PRODUCT BENEFITS

- Attractive and functional design
- Economical operation due to low power consumption
- Easy and fast mounting on nearly every surface (adhesive tape or screws)
- Light direction individually adjustable
- Accessories for flexible mounting options included

PRODUCT FEATURES

- Integrated light and motion sensor
- Available in two housing colors
- Switch for Auto- or On/Off-Mode
- Type of protection: IP54



TECHNICAL DATA

Electrical data

| | |
|-----------------|---------|
| Nominal wattage | 0.25 W |
| Operating mode | Battery |
| Nominal voltage | 4.5 V |
| Mains frequency | 0 Hz |


Photometrical data

| | |
|---------------------------|------------|
| Color temperature | 4000 K |
| Color rendering index Ra | >80 |
| Light color (designation) | Cool White |
| Luminous flux | 14 lm |
| Luminous efficacy | 4 lm/W |

Luminaire sensor data

| | |
|-------------------|------------------------|
| Type of sensor | Light / Motion |
| Sensor technology | Passive infrared (PIR) |

Dimensions & weight

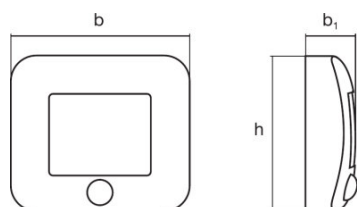

| | |
|----------------|---------|
| Length | 84.0 mm |
| Width | 73.0 mm |
| Height | 22.0 mm |
| Product weight | 98.00 g |

Colors & materials

| | |
|---------------|--------------------|
| Body material | Polycarbonate (PC) |
| Product color | White |
| Housing color | White |

Temperatures & operating conditions

| | |
|---------------------------|------------|
| Ambient temperature range | 0...+25 °C |
|---------------------------|------------|

Lifespan

| | |
|----------------------------|-------|
| Number of switching cycles | 10000 |
|----------------------------|-------|

Additional product data

| | |
|-------------------|---------|
| Mounting type | Surface |
| Mounting location | Wall |

Capabilities

| | |
|------------------------|-----------------|
| Dimmable | No |
| LED module replaceable | Not replaceable |

Certificates & standards

| | |
|--------------------|-------------------|
| Protection class | III |
| Type of protection | IP54 |
| Standards | CE/EAC/REACH/RoHS |

EQUIPMENT / ACCESSORIES

- Batteries included: 3x1.5 V LR03 (AAA)

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|----------------------|
| 4058075260658 | Blister 1 | 25 mm x 140 mm x 195 mm | 118.00 g | 0.68 dm ³ |
| 4058075260665 | Shipping carton box 6 | 163 mm x 154 mm x 210 mm | 817.00 g | 5.27 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.