


Brand	hansgrohe
Art. Name	EcoStat Select Shower thermostat for exposed installation
Art. Nr.	13161000
Surface	Chrome
Pos.	1

Product picture



Drawing

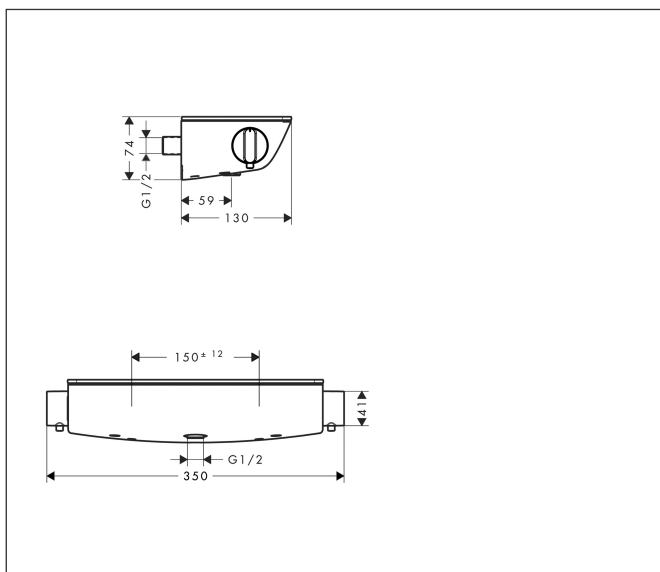

Codes / Standards

- PA-IX 19697/IB

Features

- 1 function
- thermostat cartridge, ceramic valve 180°
- volume control for 1 outlet
- material handles: metal
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- EcoStop button limits the water consumption to 10 l/min
- maximum flow rate at 3 bar: 12 l/min
- flow rate hand shower connection at 3 bar: 12 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- in case of installation on existing G 3/4 connections, adaptor no.02026000 must be used
- safety stop at 40 °C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- with silencer
- shelf made of safety glass
- surface shelf: mirror glass
- centre distance: 150 ± 12 mm
- connection dimension: DN15
- dirt filter included
- connection type: s-shaped connections

Technology

