



CorePro LEDtube EM/Mains

CorePro LEDtube 1500mm 22W 840 C

The CorePro LEDtube is an affordable LED solution suitable for replacing T8 fluorescent lamps. The product provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

Product data

• General Characteristics

Main Application	Industrial
Cap-Base	G13
Rated Lifetime	30000 hr
Nominal Lifetime hours	30000 hr
B50L70	30000

• Light Technical Characteristics

Colour Code	840
Beam Angle	150 D
Correlated Colour Temperature	4000 K
Colour rendering index	80
Rated Luminous Flux	2000 Lm
LLMF - end nominal lifetime	70 %
Colour consistency	6 steps
Rated Beam Angle	150 D

• Electrical Characteristics

Wattage	22 W
Voltage	220-240 V
Line Frequency	50/60 Hz
Power Factor	0.9 (min) -
Dimmable	No
Rated Wattage	22 W
Starting Time	0.5 (max) s
Lamp voltage	220-240 V
Warm-up Time to 60% Light Outp	instant full light
Energy saving product	Yes

Suitable for accent lighting No

• Temperature Characteristics

T-case maximum	55 (max) C
Operating temperature	-20 (min), 45 (max) C
T-Storage	-40 (min), 65 (max) C

• Environmental characteristics

Energy Efficiency Label (EEL)	A+
Energy consumption kWh/1000h	22 kWh

• Measuring Conditions

Switching cycle 50000X

• Product Dimensions

Length A1	1500.0 mm
Fixing Hole Distance A2 Length	1507.1 mm
Length A3	1514.2 mm
Mounting hole diameter	25.68 mm
Circular outline dimension	28 mm

• Approval & Application Chars

VDE marking	No
CE marking	Yes
UL certificate	No



PHILIPS

CorePro LEDtube EM/Mains


RoHS compliance Yes
 KEMA Keur certificate Yes

Pieces per pack 1
 Packing configuration 10
 Packs per outerbox 10
 Bar code on pack - EAN1 8718696427941
 Bar code on outerbox - EAN3 8718696427958
 Logistic code(s) - 12NC 929001128602
 Net weight per piece 0.450 kg

• **Product Data**


Order code 427941 00
 Full product code 871869642794100
 Full product name CorePro LEDtube 1500mm 22W 840 C
 Order product name CorePro LEDtube 1500mm 22W 840 C

Dimensional drawing

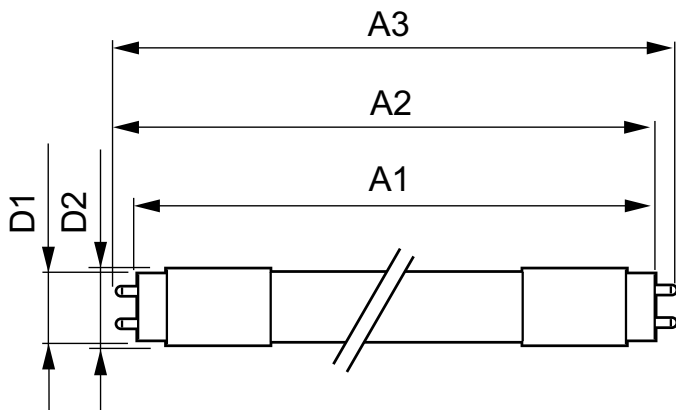


CorePro LEDtube 1500mm 22W 840 C

Product	A (Norm)	A1 (Norm)	A2 (Norm)	A3 (Norm)	B (Min)	B (Norm)	B (Max)	D (Min)	D (Norm)	D (Max)	D1 (Norm)	D2 (Norm)
LEDtube 1500mm 22W 840 C	-	1500.0	1507.1	1514.2	-	-	-	-	-	-	25.68	28



G13

Photometric data

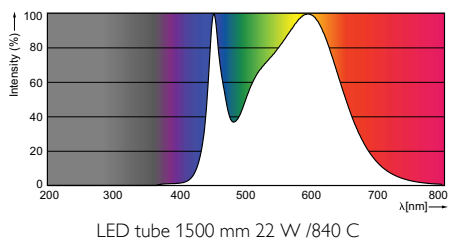



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of
Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, November 12
data subject to change