

# PRODUCT DATASHEET

## SF BLKH 300 15W/3000K WT IP65

**SURFACE BULKHEAD 300 ON/OFF | Robust wall and ceiling luminaire with IP65 protection**



---

### AREAS OF APPLICATION

- Direct replacement for luminaires with fluorescent lamps
- Corridors, stairways, entrance areas
- Passages, underpasses
- Public areas

---

### PRODUCT BENEFITS

- Suitable for use in dusty and damp locations thanks to high IP rating
- Suitable for use in public areas thanks to high IK rating
- Multiple mounting patterns for convenient installation
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- 5 years guarantee

---

### PRODUCT FEATURES

- UV-stabilized polycarbonate (PC) housing, PC-diffuser
- Impact resistance: IK10
- Push wire terminal for tool-free connection
- Through wiring possible
- Type of protection: IP65
- Luminous flux: up to 1,400 lm
- High luminous efficacy: up to 95 lm/W



- Lifetime (L70/B50): up to 50,000 h (at 25 °C)
- Ambient temperature in operation: -20...+40 °C

## TECHNICAL DATA

### Electrical data

Nominal wattage	12.40 W
Operating mode	Integrated LED driver
Nominal voltage	220...240 V
Power factor $\lambda$	$\geq 0.5$
Mains frequency	50/60 Hz
Max. no. of lum. on circuit break. B16 A	94
Max. no. of lum. on circuit break. C10 A	75
Max. no. of lum. on circuit break. C16 A	120
Inrush current	4.52 A
Total harmonic distortion	< 10 %
Inrush current time $T_{h50}$	50 $\mu$ s

### Luminaire control gear data

Low flicker	Yes
-------------	-----


### Photometrical data

Color temperature	3000 K
Luminous flux	1400 lm
Luminous efficacy	93 lm/W
Standard deviation of color matching	<5 sdc <sub>m</sub>
Light color (designation)	Warm White
Color rendering index Ra	>80

### Light technical data

Beam angle	120 °
------------	-------

Dimensions & weight

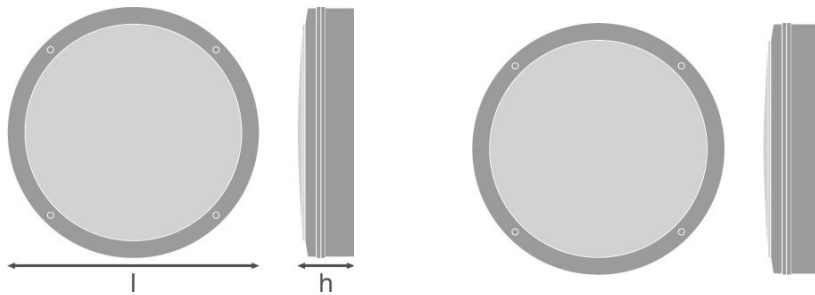

<b>Diameter</b>	300.0 mm
<b>Height</b>	70.0 mm
<b>Product weight</b>	680.00 g

Colors & materials

<b>Body material</b>	Polycarbonate (PC)
<b>Product color</b>	White
<b>Housing color</b>	White
<b>Cover material</b>	Polycarbonate (PC)

Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+40 °C
----------------------------------	--------------

Lifespan

<b>Number of switching cycles</b>	100000
<b>Lifespan L70/B50 at 25 °C</b>	50000 h
<b>Lifespan L80/B10 at 25 °C</b>	35000 h
<b>Lifespan L90/B10 at 25 °C</b>	20000 h

Additional product data

<b>Mounting type</b>	Surface
<b>Mounting location</b>	Ceiling / Wall
<b>Low flicker</b>	Yes
<b>Product remark</b>	Available from March 2020

Capabilities

<b>Dimmable</b>	No
<b>Type of connection</b>	Screwless terminal
<b>LED module replaceable</b>	Not replaceable


Certificates & standards

<b>Protection class IK (shock resistance)</b>	IK10
<b>Glow Wire Test according to IEC 60695-2-12</b>	850 °C
<b>Photobiological safety group EN62778</b>	RG 0
<b>Protection class</b>	II
<b>Type of protection</b>	IP65
<b>Standards</b>	CE/CB/ROHS

Light Distribution



LDC typ cone

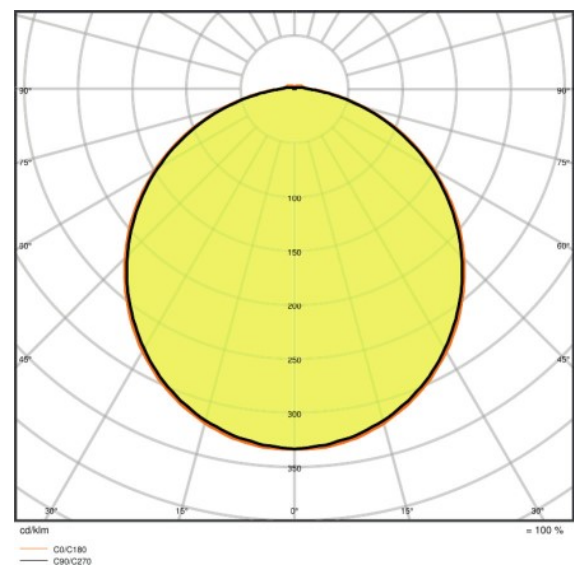

LDC typ polar

EQUIPMENT / ACCESSORIES

- Additional cover rings in different designs available
- Mounting screws and dowels included


LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075375161	Folding carton box 1	74 mm x 322 mm x 312 mm	785.00 g	7.43 dm <sup>3</sup>
4058075375178	Shipping carton box 8	650 mm x 335 mm x 315 mm	7001.00 g	68.59 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

**ADDITIONAL CATALOG INFORMATION**




---

**REFERENCES / LINKS**

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

**DISCLAIMER**

— Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.